ARIZONA DEPARTMENT OF TRANSPORTATION

REPORT NUMBER
1980-NS 1

# FIELD AND LABORATORY EVALUATION OF DEBONDING TEST PROCEDURES

**Prepared by:**
Noel R. Scott
and
John B. Ritter
Materials Services
206 S. 17th Ave.
Phoenix, Arizona 85007

March 1980

# FIELD AND LABORATORY EVALUATION

# OF

# DEBONDING TEST PROCEDURES

June 1979

Final Report HPR-1-15(149)

Noel R. Scott, P. E.
&
John B. Ritter, P. E.
ARIZONA DEPARTMENT OF TRANSPORTATION
1745 West Madison Street
Phoenix, Arizona 85007

Under the Direction of
Gene R. Morris
Engineer of Research
and Supervision of
Grant J. Allen
Engineer of Materials

Disclaimer

The contents of this report reflect the views of the authors, who are responsible for the facts and the accuracy of data presented herein. The contents do not necessarily reflect the official views or policies of the Arizona Department of Transportation or the Federal Highway Administration. This report does not constitute a standard specification, or regulation. Trade or manufacturers names which may appear herein are cited only because they are considered essential to the objectives of the report. The U. S. Government and the State of Arizona do not endorse products or manufacturers.

Technical Report Documentation Page

| 1. Report No. | 2. Government Accession No. | 3. Recipient's Catalog No. |
|---|---|---|
| FHWA-AZ-HPR-1-15(149) | | |

| 4. Title and Subtitle | 5. Report Date |
|---|---|
| Field and laboratory evaluation of Debonding Test Procedures. | March, 1980 |
| | 6. Performing Organization Code |
| 7. Author(s) Noel R. Scott, John B. Ritter | 8. Performing Organization Report No. |
| 9. Performing Organization Name and Address<br>Arizona Department of Transportation<br>Materials Services<br>1745 West Madison Phoenix, AZ 85007 | 10. Work Unit No. (TRAIS) |
| | 11. Contract or Grant No. HPR-1-18(149) |
| 12. Sponsoring Agency Name and Address<br>Arizona Department of Transportation<br>206 South 17th Avenue<br>Phoenix, AZ 85007 | 13. Type of Report and Period Covered |
| | 14. Sponsoring Agency Code |

15. Supplementary Notes

In cooperation with the U.S. Department of Transportation, Federal Highway Administration.

16. Abstract

The method of testing for debonding susceptible asphaltic concrete mixes by the double punch method is examined. The procedure and apparatus for testing is presented. Data comparing the double punch method to the immersion compression method is documented and evaluated for relationships between the two methods. It was concluded that the double punch method is easy to use, saves time and can readily test field cores. With suggested minor modifications it is recommended that this mix design method be incorporated into ADOT testing practice.

| 17. Key Words | 18. Distribution Statement |
|---|---|
| Debonding, stripping, double punch, hydraulic stressing, asphaltic concrete, immersion compression, compaction, asphaltic concrete testing. | |

| 19. Security Classif. (of this report) | 20. Security Classif. (of this page) | 21. No. of Pages | 22. Price |
|---|---|---|---|
| Unclassified | Unclassified | 38 | |

Form DOT F 1700.7 (8-72) Reproduction of completed page authorized

## ABSTRACT

Identifying asphaltic concrete mixes that may be susceptible to debonding has and continues to be an important part of the design procedures of the Arizona Department of Transportation. For this reason, a study was conducted to correlate the double punch test to the immersion compression test. The time efficiency and debonding predictability was studied. Correlation was accomplished and the double punch test is being considered for incorporation into the mix design procedure as a replacement for the immersion compression test now being used.

ACKNOWLEDGEMENTS

The writers wish to thank Mr. Gene R. Morris of the Engineering Research Division of the Arizona Department of Transportation for his help and direction during this project.

Thanks goes to Mr. Clarence Shields of the Asphaltic Mix Design Section of Materials Services of the Arizona Department of Transportation for his assistance in laboratory testing and data collection.

Finally, the dedicated work of many individuals at Materials Services of the Arizona Department of Transportation in laboratory testing, data collection, data reduction and clerical work is appreciated.

TABLE OF CONTENTS


| | Page |
|---|---|
| List of Figures | iii |
| List of Tables | iv |
| Chapter 1. Introduction | 1 |
| 1.1 General | 1 |
| 1.2 Research Approach | 2 |
| 1.3 Test Program | 2 |
| Chapter 2. Findings | 12 |
| 2.1 Testing Capability | 12 |
| 2.2 Time Efficiency | 14 |
| 2.3 Correlation | 14 |
| Chapter 3. Interpretation | 16 |
| Chapter 4. Conclusion and Recommendation | 18 |
| References | 19 |
| Appendix A | 20 |
| Appendix B | 36 |

FIGURES


| | | Page |
|---|---|---|
| Figure 1 | Specimen Placed in Stressing Chamber Prior to Vacuum Saturation . . . . . | 5 |
| Figure 2 | Stressing Chamber in 122°F Bath in Position for Vacuum Saturation . . . . . | 6 |
| Figure 3 | Stressing Chamber with Vacuum Attached . . . . . | 7 |
| Figure 4 | Stressing Chamber with Annulus . . . . . | 8 |
| Figure 5 | Stressing Chamber with Annulus in Place . . . . . | 8 |
| Figure 6 | Stressing Chamber in Position to be Stressed . . . . . | 9 |
| Figure 7 | Specimen in Position for Double Punch Tensile Test . . . . . | 11 |
| Figure 8 | Specimen in Position for Double Punch Tensile Test . . . . . | 11 |
| Figure 9 | Sinusoidal Force Curve Generated by Stressing Apparatus . . . . . | 12 |
| Figure 10 | Aluminum Pot with Copper Heating Coil Used for Chamber Bath During Stressing . . . . . | 13 |
| Figure 11 | Treatment Reaction Curve for Specimens Compacted by Static Compaction . . . . . | 29 |
| Figure 12 | Treatment Reaction Curve for Specimens Compacted by Vibratory Compaction . . . . . | 30 |
| Figure 13 | Treatment Reaction Curve for Specimens Compacted by Hveem Compaction . . . . . | 31 |
| Figure 14 | Percent Retention Graph for Cement Treated Specimens . . . . . | 32 |
| Figure 15 | Compressive Stress vs Tensile Stress Comparison . . . . . | 33 |
| Figure 16 | Percent Retention Graph for Anti-Strip Treated Specimens . . . . . | 34 |
| Figure 17 | Percent Retention Graph for Untreated Specimens . . . . . | 35 |

TABLES


| | | Page |
|---|---|---|
| Table 1 | Results of Immersion Compression VS Double Punch (Static Compaction) . . . . . | 21 |
| Table 2 | Results of Immersion Compression VS Double Punch (Vibratory Compaction) . . . . . | 22 |
| Table 3 | Results of Immersion Compression VS Double Punch (Hveem Compaction) . . . . . | 23 |
| Table 4 | Density Comparisons . . . . . | 24 |
| Table 5 | Results of Field Comparisons . . . . . | 25 |
| Table 6 | Aggregate Type . . . . . | 26 |

Chapter 1

# INTRODUCTION

## 1.1 General

Debonding of the asphalt cement from its aggregate interface has been of great interest to highway officials for some time and is a serious problem. The handiwork of this "stripping" phenomenon is a weakening of the strength of the structure, bleeding and/or raveling of the surface. Naturally the interest to highway officials is generated by the expense of time and money necessary for rebuilding, repairing and/or resurfacing.

For this reason, identifying asphaltic concrete mixes that may be susceptible to debonding becomes significant during the design phase. The "state of the art" of predicting stripping has developed several different techniques, procedures and tests. These tests are based on the different theories of the mechanisms of debonding. Two theories of the mechanisms of debonding are based on failure stresses resulting from two (2) modes; a) water pressure and erosion, and b) thermal cycles on wet pavements.[1] The immersion-compression test (ARIZ 802), a modification of (AASHTO T165-55), employs the thermal cycle principle of conditioning and unconfined compression strength as the measurement gauge. Currently the Arizona Department of Transportation is employing this test for identifying stripping susceptible mix designs. In 1973, a final report was issued on research project Arizona HPR 1-10 (123) titled "Testing for Debonding of Asphalt from Aggregate".

[1]Dr. R. A. Jimenez, "Testing for Debonding of Asphalt from Aggregate"

The author, Dr. R. A. Jimenez, recommended a new test procedure using the water pressure theory in the conditioning portion of the test. This test procedure is commonly known as the double punch.

The overall objective of this investigation was to provide confidence in the double punch procedure (DP) and to determine whether this procedure would provide an improved test over the immersion-compression test (IMC). Following is the approach to the investigation, and the testing program.

## 1.2 Research Approach

A. To develop a testing capability for the debonding test procedure in the Central Laboratory.

B. To study the time efficiency of the new test procedure.

C. To relate the new test to existing immersion-compression tests, and debonding predictions from both to newly constructed pavement conditions.

The test procedure was studied also to the degree and type of compaction.

## 1.3 Test Program

The first part of the test program was to acquire equipment capable of testing by the double punch method. The apparatus necessary to apply a sinusoidal stressing pattern through a pore water pressure medium was built and calibrated. Stressing cylinders were also fabricated. A water bath was purchased exclusively for this study. Punch attachments were fabricated to fit our hydraulic press.

The second part of the testing was to study the time efficiency of the new test. The time required for preparation and for testing was studied.

Thirdly, relating the new test procedure to the existing immersion-compression procedure was routinely accomplished in the lab by incorporating the new test into the mix design procedure and by sampling and testing field specimens. A copy of the immersion-compression test method is included in Appendix B, p.36.

Following is the double punch procedure.

DOUBLE PUNCH
TEST METHOD

The test method consisted of preparing, conditioning and testing specimens for strength. The preparation of the test specimens was accomplished by grading aggregates and mixing the optimum asphalt quantity with the aggregate. The weight of the mix was approximately 1150 grams or the weight necessary to mold a 2.5 in. (63.5mm) high by 4 in. (101.6mm) diameter specimen. Nine specimens were to be prepared. Five of the nine specimens were mixed with an AR grade asphalt. Two specimens were mixed with an AR grade asphalt that had a liquid antistrip additive added to the asphalt (1.0% by weight of the asphalt). Two specimens were prepared by deleting 2% of the -#200 mineral aggregate and replacing with 2% cement.

Several methods of compacting these mixes were tried. The first 5 sets of samples were compacted by static means. A pressure of 3000 psi was applied and held for 2 minutes. This is similar to the immersion-compression (IMC) compaction method. The next 11 sets of samples were compacted by means of the vibratory compactor. The compactive effort was produced by two 2 in. (50.8mm) weights on each end of two counter rotating shafts developing approximately 400 lb. force @ 1000 rpm. A dead load of 225 lb. force also bears on the specimen through a compaction foot that is angled at $1^{o}$ which allows orientation of particles through the resultatnt kneading action. The last 4 sets of samples were compacted by the Hveem method. A Triaxial Institute (T.I.) compactor was used to apply the 500 psi force with 150 tamping blows.

Conditioning was accomplished on all but 3 of the specimens in each set. These 3 specimens, which have no treatment added, were tested

unconditioned and are referred to as "dry" specimens. Conditioning consists of saturating and stressing. Following is the procedure for conditioning.

## CONDITIONING

### SATURATION

1. The specimens to be conditioned are each placed in a stressing chamber. See Figure 1 below.

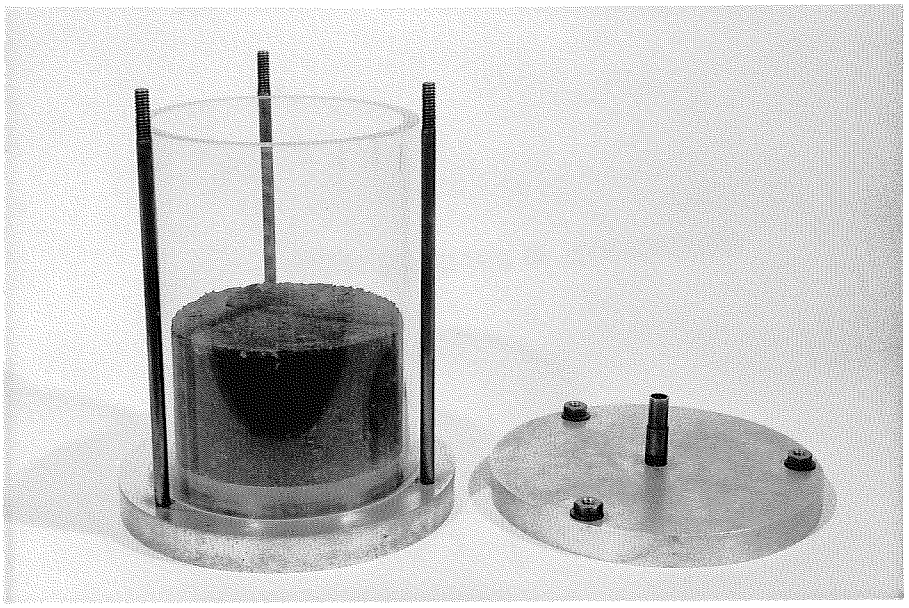

Figure 1 Specimen Placed in Stressing Chamber Prior to Vacuum Saturation

2. The chamber is placed in the 50°C (122°F) water bath. The specimen is covered with about 2 in. (50mm) of 122°F water and a lid is secured on the chamber. See Figure 2 next page.

3. The chamber with specimen is allowed to stand in the bath for approximately 15 minutes.
4. A vacuum pressure of 20 in (508mm) Hg is applied to the chamber for 5 minutes. See Figure 3 on next page.
5. The vacuum is then released and the chamber is left standing for 30 minutes to bring specimen to bath temperature.

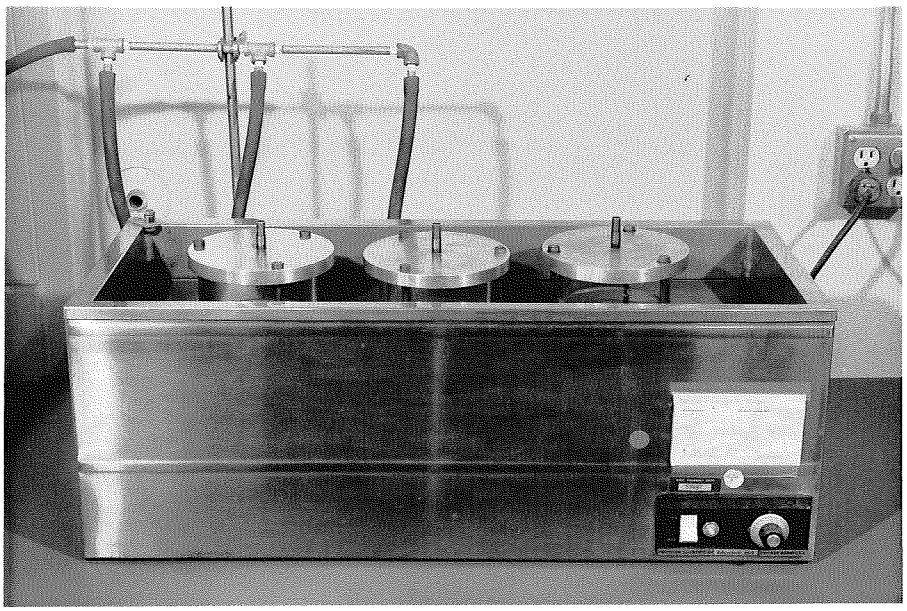

Figure 2 Stressing Chamber in 122°F Bath in Position for Vacuum Saturation

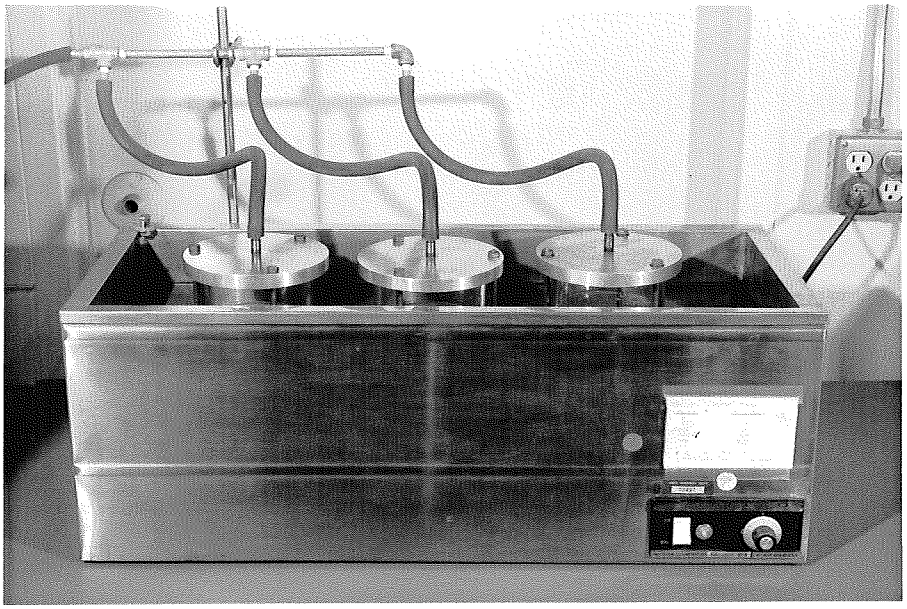

Figure 3 Stressing Chamber with Vacuum Attached

STRESSING

6. With the chamber and specimen still in the hot water bath, the lid is removed and replaced with a stressing-ring. The ring is secured tightly.
7. A 1 in. (25.4mm) thick Flexane rubber annulus is placed into the chamber beneath the water. All entrapped air beneath the annulus is released by tipping the chamber from side to side. See Figure 4 and 5 next page.

8. The annulus is then adjusted until it is perpendicular to the cylindrical axis of the chamber and approximately 1/4 in. (6.3mm) to 1/2 in (12.7mm) above the top surface of the specimen.

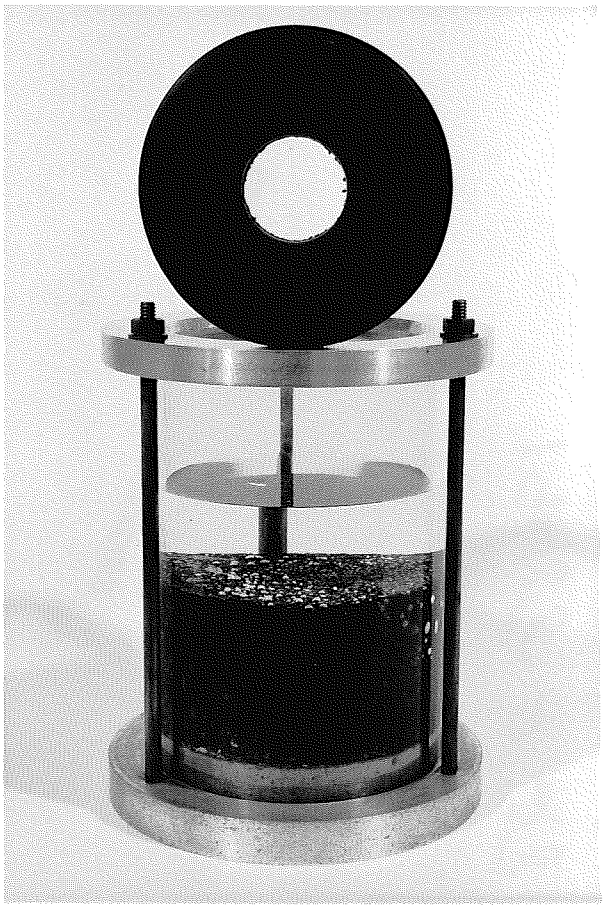

Figure 4 Stressing Chamber with Annulus

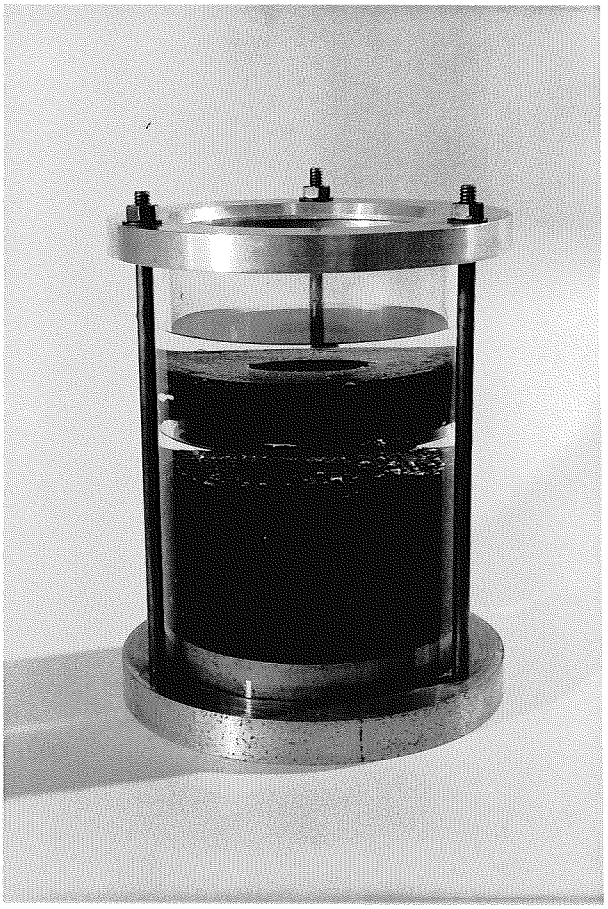

Figure 5 Stressing Chamber with Annulus in Place

9. The chamber is removed from the hot water bath and quickly placed in position on the stressing apparatus table.

10. The stressing apparatus is lowered until the 4 in. (101.6mm) diameter foot makes contact with the top of the annulus. Lowering is continued until water and annulus support the weight. See Figure 6 below.

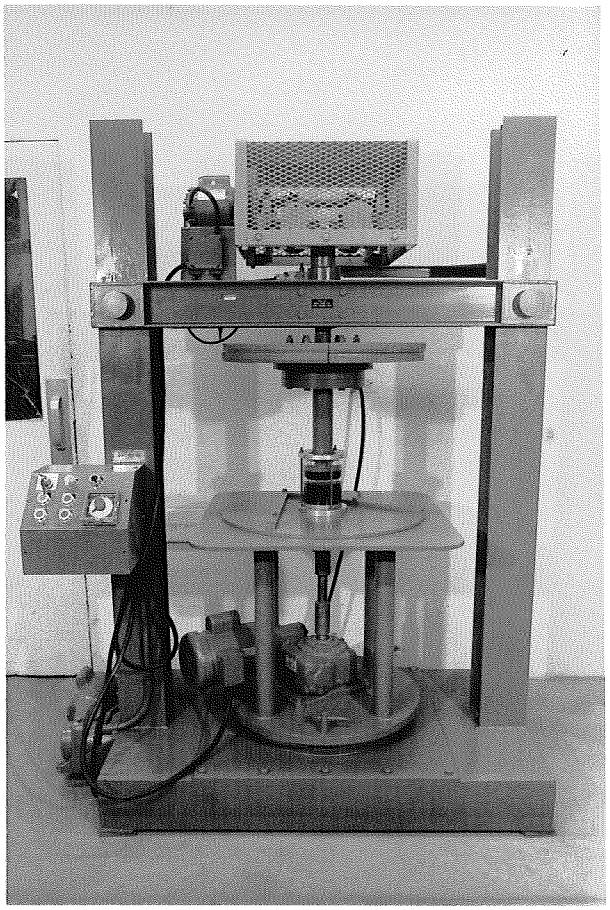

Figure 6 Stressing Chamber in Position to be Stressed

11. The timer is set to the time period required (5,800 cycles).
12. The electric motor is activated.
13. After the stressing time has elapsed, the chamber is removed and the specimen removed and placed in a $25^{o}C$ ($77^{o}F$) water bath for a minimum of 45 minutes.

STRENGTH TEST

1. The specimen is centered on the 1 in. (25.4mm) diameter bottom punch. See Figure 7 and 8 next page.
2. The upper punch, same diameter, is lowered until it just touches the upper surface of the specimen.
3. The specimen is loaded at 1.0 in. (25.4mm) per minute.
4. The maximum load is recorded.
5. The tensile stress is calculated from the equation below.

$$\sigma+ = P/\ \pi(1.2bH-a^2)$$ [2]

$\sigma+$ = tensile stress, psi (Pa)

P = maximum load, lb. (N)

a = radius of punch, in. (mm)

b = radius of specimen, in. (mm)

H = Height of specimen, in. (mm)

[2] Dr. R. A. Jimenez, "Testing for Debonding of Asphalt from Aggregate"

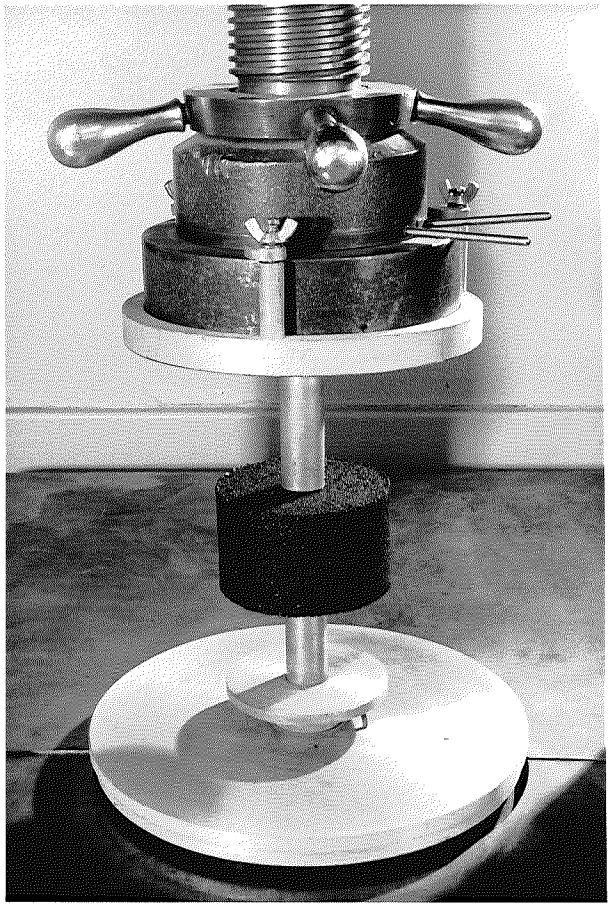

Figure 7 Specimen in Position for Double Punch Tensile Test

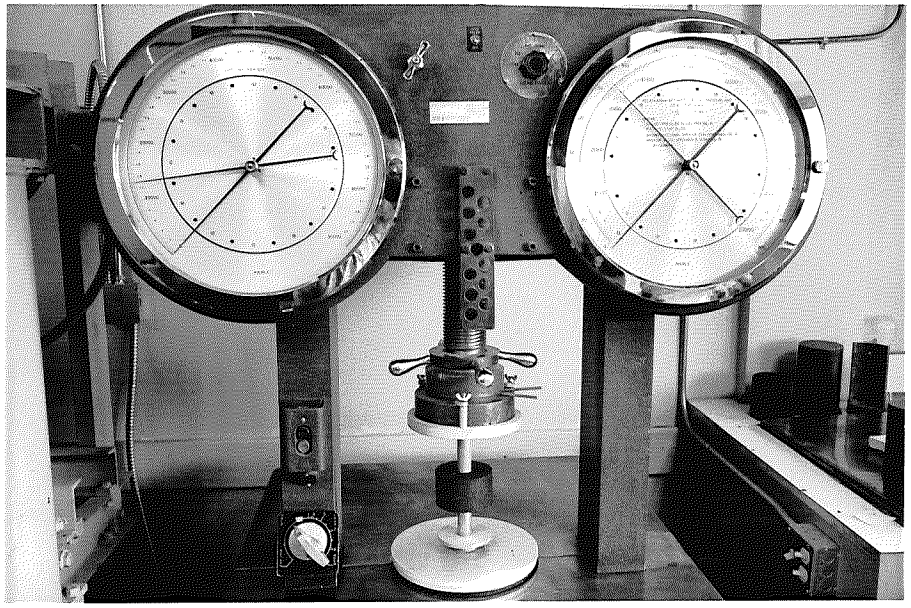

Figure 8 Specimen in Position for Double Punch Tensile Test

CHAPTER 2

FINDINGS

The following findings are based upon 20 laboratory sample sets and 8 field sample sets.

## 2.1 Testing Capability

The capability to test by the double punch procedure was accomplished by a stressing apparatus, a water bath, stressing chambers, and punch attachments. In the course of testing, it became necessary to add a bath for the stressing chamber to be immersed in, so that temperature loss during stressing would be minimal. This was accomplished by pumping water from the conditioning bath into coiled copper tubing that encircled the chamber. This kept the chamber bath water at $122^{o}F \pm 4^{o}$. An aluminum pot was used for the bath. See Figure 10 next page.

The stressing apparatus was calibrated by adjusting pulley sizes for speed variation, and by balancing the counterweights more accurately. The 1/4 hp electric motor had to be replaced by a 1/3 hp, because of over-heating and fluctuating speed. The dead load of 225 lb. in combination with the sinusoidal generated loading results in a loading diagram as shown in Figure 9 below. The peak load divided by the area of the foot results in approximately 30 psi pressure.

Figure 9

SINUSOIDAL FORCE CURVE STRESSING APPARATUS

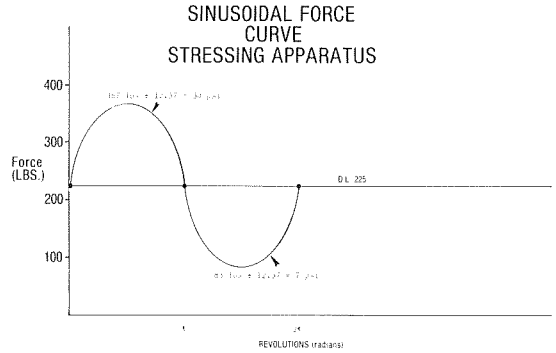

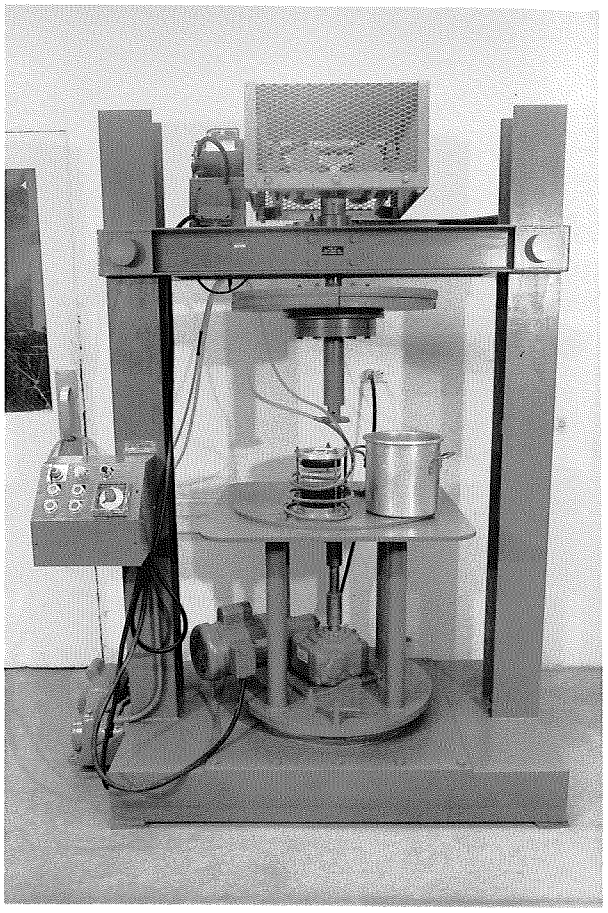

Figure 10 Aluminum Pot with Copper Heating Coil used for Chamber Bath during Stressing

## 2.2 Time Efficiency

The time efficiency for the 3 phases (preparation, conditioning, and testing) was examined. The time in preparation of specimens for both test methods is approximately equal. The time needed for the conditioning of one complete set of IMC specimens is 26 hours. The time needed for the conditioning of one complete set of DP specimens is 3-1/2 hours. The time needed for testing is approximately equal for both test methods. Using the optimum timing for beginning both tests, the DP will give results 24 hours sooner than IMC.

## 2.3 Correlation

Aggregate Type

The types of aggregates used in this testing program were cinders, basalts, limestones, granites and even one recycled aggregate. The aggregate types are listed in Table 6. There was no indication that aggregate type had any notable effect on the results of the IMC test versus the DP test.

Compaction Method

The effect of compaction on the specimens was not clearly shown in the results obtained. However, it became evident that density control was best obtained by the Hveem method, then the static method and lastly the vibratory method(See Tables 1, 2, 3 and Figures 11, 12, 13).

Retention and Strength Results

The correlation coefficients were calculated for the laboratory prepared sample sets. Following is the ranking of the correlation.

| | N | Correlation ($R^2$) |
|---|---|---|
| Without Treatment | 19 | .6373 |
| Anti-strip | 20 | .5262 |
| Compression vs Tension | 77 | .3145 |
| Cement | 18 | .2859 |

The lines of best fit are plotted on Figures 14, 15, 16 and 17 (p. 32, 33, 34 and 35 respectively).

Field Comparisons

Uncompacted plant mixed samples were taken from ahead of the lay-down machine in the field. Cores were taken three months later at the same location. The plant mixed samples were heated, molded, conditioned and tested by IMC and DP procedures. The specimens were made in triplicate to minimize variability. The dry or "unconditioned" strength of the "plant mix", laboratory molded, specimen versus the dry strength of the core was erratic. The core strengths averaged 68% of the laboratory molded sample strengths. The values were extremely high, or extremely low, therefore no correlation could be seen. The values are tabulated in Table 5, page 26.

# CHAPTER 3

# INTERPRETATION

The double punch procedure is a relatively simple test to perform. No special knowledge or skill is needed. The laboratory technician would only be occupied during the 3-1/2 hours needed for conditioning and for approximaterly 1/2 hour for the strength test. Using temperature and hydraulic pressure to debond the asphalt from the aggregate is an excellent simulation of the actual conditions that an asphalt pavement experiences. In explaining why better correlation exists between the groups of data as shown in Figures 14, 15, 16 and 17, several factors must be examined.

The first factor to examine is compaction or density. Naturally, the more impermeable a mix is the greater the resistance to the effects of water. The DP method would use the T.I. method of compaction which would generate densities of approximately 95% of maximum theoretical density (MTD). The static method of compaction used in the method generates densities of approximately 92% of MTD at 3000 psi. Densities greater than 92% could be achieved by increasing the pressure, but 92% is the required minimum densitity called for in the field.

The second factor to consider is the severity of the conditioning. It is the authors' feeling that dynamic stressing for a shorter time period is more severe and better simulation than a longer period of exposure at static conditions. The time in conditioning affected the cement treated samples significantly. The 24 hour immersion called for in the IMC method gives ample time for the cement to hydrate or react whereas the 60 minutes of immersion

required in the DP method does not give the cement time to react. In Figure 14, this cement reaction is shown by the intercept on the IMC axis.

The third factor that should be considered is the method of test or failure mode. The IMC method induces failure by direct unconfined compression. Shear strength is perhaps the property being measured in this failure mode. In the DP method, tensile strength is being measured with the punches precipitating this failure. It is generally believed that cement, as an additive, builds strength, especially after immersion in water. This strength gain would be more significant when measured in shear than in tension. This coupled with the length of time of immersion would account for the higher results for cement IMC vs DP (See Figure 14, p. 32 ).

# CHAPTER 4

## CONCLUSION AND RECOMMENDATION

The double punch method is easy to use, saves time and can easily test field cores. It is the authors feeling that this method, with some minor modifications, should be incorporated into the mix design methods of the Arizona Department of Transportation.

The modifications that are suggested are as follows:

1. Compact the specimens to approximate the 92% level, which is the minimum required value in the field.

2. Increase the severity of the conditioning to simulate heavy truck loadings.

## REFERENCES


1. Jimenez, R. A., "Testing for Debonding of Asphalts from Aggregates", Report to Arizona Department of Transportation, Final, Research Project HPR 1-10(123), University of Arizona, 1973.

2. Materials Testing Manual, Arizona Highway Department, 1969.

# APPENDIX A

TABLE 1

IMMERSION COMPRESSION VS DOUBLE PUNCH (STATIC COMPACTION)

| | | IMMERSION COMPRESSION | | | DOUBLE PUNCH | | |
|---|---|---|---|---|---|---|---|
| LAB # | | AIR PSI | $H_2O$ PSI | % RET | AIR PSI | $H_2O$ PSI | % RET |
| 1 | Blank | 311 | 223 | 72 | 103 | 85 | 83 |
| | 1% Anti-Strip | | 338 | 109 | | 85 | 83 |
| | 2% Cement | | 371 | 119 | | 107 | 104 |
| 2 | Blank | 448 | 209 | 47 | 106 | 44 | 42 |
| | 1% Anti-Strip | | 305 | 68 | | 73 | 69 |
| | 2% Cement | | 416 | 93 | | 74 | 70 |
| 3 | Blank | 143 | 104 | 73 | 73 | 53 | 73 |
| | 1% Anti-Strip | | 173 | 121 | | 54 | 74 |
| | 2% Cement | | 208 | 145 | | 54 | 74 |
| 4 | Blank | 329 | 253 | 77 | 103 | 72 | 60 |
| | 1% Anti-Strip | | 315 | 96 | | 66 | 64 |
| | 2% Cement | | 378 | 115 | | 74 | 72 |
| 5 | Blank | 288 | 183 | 64 | 113 | 49 | 44 |
| | 1% Anti-Strip | | 229 | 79 | | 71 | 63 |
| | 2% Cement | | 305 | 106 | | 75 | 67 |

TABLE 2

IMMERSION COMPRESSION RESULTS VS DOUBLE PUNCH (VIBRATORY COMPACTION)

| | | IMMERSION COMPRESSION | | | DOUBLE PUNCH | | |
|---|---|---|---|---|---|---|---|
| LAB # | | AIR PSI | $H_2O$ PSI | % RET | AIR PSI | $H_2O$ PSI | % RET |
| 6 | Blank | 831 | 359 | 43 | 114 | 48 | 42 |
| | 1% Anti-Strip | | 353 | 42 | | 50 | 44 |
| | 2% Cement | | | | | | |
| 7 | Blank | 308 | 250 | 81 | 70 | 55 | 79 |
| | 1% Anti-Strip | | 307 | 100 | | 86 | 123 |
| | 2% Cement | | 357 | 116 | | 49 | 70 |
| 8 | Blank | 300 | 253 | 84 | 186 | 168 | 90 |
| | 1% Anti-Strip | | 297 | 99 | | 164 | 88 |
| | 2% Cement | | 374 | 125 | | 134 | 72 |
| 9 | Blank | 255 | 126 | 49 | 116 | 62 | 53 |
| | 1% Anti-Strip | | 169 | 66 | | 73 | 63 |
| | 2% Cement | | 250 | 98 | | 81 | 70 |
| 10 | Blank | 207 | 99 | 48 | 76 | 47 | 61 |
| | 1% Anti-Strip | | 136 | 66 | | 54 | 70 |
| | 2% Cement | | 236 | 114 | | 54 | 70 |

TABLE 2 (con't)

| LAB # | | IMMERSION COMPRESSION AIR PSI | IMMERSION COMPRESSION $H_2O$ PSI | IMMERSION COMPRESSION % RET | DOUBLE PUNCH AIR PSI | DOUBLE PUNCH $H_2O$ PSI | DOUBLE PUNCH % RET |
|---|---|---|---|---|---|---|---|
| 11 | Blank | 452 | 426 | 94 | 186 | 170 | 91 |
| | 1% Anti-Strip | | 452 | 100 | | 155 | 83 |
| | 2% Cement | | 533 | 118 | | 106 | 57 |
| 12 | Blank | 347 | | | 114 | | |
| | 1% Anti-Strip | | 372 | 107 | | 135 | 119 |
| | 2% Cement | | | | | | |
| 13 | Blank | 298 | 110 | 37 | 129 | 41 | 31 |
| | 1% Anti-Strip | | 241 | 81 | | 85 | 66 |
| | 2% Cement | | 405 | 136 | | 121 | 94 |
| 14 | Blank | 258 | 85 | 33 | 130 | 43 | 33 |
| | 1% Anti-Strip | | 119 | 46 | | 83 | 64 |
| | 2% Cement | | 165 | 64 | | 70 | 54 |
| 15 | Blank | 348 | 135 | 39 | 173 | 63 | 37 |
| | 1% Anti-Strip | | 151 | 43 | | 57 | 33 |
| | 2% Cement | | 231 | 66 | | 77 | 45 |
| 16 | Blank | 248 | 209 | 84 | 103 | 82 | 80 |
| | 1% Anti-Strip | | 245 | 99 | | 86 | 83 |
| | 2% Cement | | 366 | 148 | | 106 | 103 |

TABLE 3

IMMERSION COMPRESSION RESULTS VS DOUBLE PUNCH (VHEEM COMPACTION)

| | | IMMERSION COMPRESSION | | | DOUBLE PUNCH | | |
|---|---|---|---|---|---|---|---|
| LAB # | | AIR PSI | $H_2O$ PSI | % RET | AIR PSI | $H_2O$ PSI | % RET |
| 17 | Blank | 205 | 75 | 37 | 81 | 49 | 60 |
| | 1% Anti-Strip | | 109 | 53 | | 46 | 57 |
| | 2% Cement | | 171 | 83 | | 58 | 72 |
| 18 | Blank | 247 | 139 | 56 | 67 | 48 | 72 |
| | 1% Anti-Strip | | 224 | 91 | | 66 | 99 |
| | 2% Cement | | 275 | 111 | | 61 | 91 |
| 19 | Blank | 411 | 180 | 44 | 120 | 46 | 38 |
| | 1% Anti-Strip | | 227 | 55 | | 68 | 57 |
| | 2% Cement | | 340 | 83 | | 117 | 98 |
| 20 | Blank | 262 | 95 | 31 | 96 | 60 | 63 |
| | 1% Anti-Strip | | 152 | 58 | | 65 | 68 |
| | 2% Cement | | 221 | 84 | | 62 | 65 |

TABLE 4

DENSITY COMPARISON
(pounds per cubic foot)

| LAB # | BLANK AVERAGE | ANTI-STRIP AVERAGE | CEMENT AVERAGE | 92% MAXIMUM THEORETICAL DENSITY | METHOD OF COMPACTION |
|---|---|---|---|---|---|
| 5 | 142.4 | 140.6 | 141.3 | 139.0 | Static |
| 6 | 138.0 | 137.7 | ----- | 141.4 | Vibratory |
| 7 | 124.4 | 125.8 | 122.9 | 119.3 | Vibratory |
| 9 | 147.9 | 146.7 | 149.4 | 141.9 | Vibratory |
| 10 | 142.7 | 144.2 | 143.5 | 138.4 | Vibratory |
| 14 | 152.8 | 153.4 | 153.4 | 145.5 | Vibratory |
| 15 | 143.0 | 142.3 | 144.2 | 137.0 | Vibratory |
| 16 | 146.2 | 147.8 | 146.6 | 139.8 | Vibratory |
| 17 | 149.3 | 151.1 | 149.7 | 145.8 | Hveem |
| 18 | 138.4 | 138.7 | 141.4 | 135.4 | Hveem |
| 19 | 143.6 | 144.2 | 146.8 | 139.4 | Hveem |
| 20 | 146.9 | 146.6 | 149.3 | 142.5 | Hveem |

TABLE 5

FIELD COMPARISON

| LAB # | LOCATION | IMMERSION COMPRESSION | | | DOUBLE PUNCH | | | DOUBLE PUNCH @ 90 DAYS | | | $\frac{DRY_{90}}{DRY_{INITIAL}}$ % |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | DRY PSI | WET PSI | % | DRY PSI | WET PSI | % | DRY PSI | WET PSI | % | |
| 1F | I 19-1(41) Nogales-Tucson | 428 | 367 | 86 | 140.8 | 126.4 | 90 | 59.4 | 59.1 | 99 | 42 |
| 2F | RS 453(1) Snowflake-Concho | 308 | 250 | 81 | 46.9 | 41.8 | 89 | 38.2 | 21.4 | 56 | 81 |
| 3F | I 40-2(76) Kingman-Ash Fork | 465 | 423 | 91 | 137.9 | 131.5 | 95 | 60.6 | 56.6 | 93 | 44 |
| 4F | U 463(5) 3rd St-Jct Hwy 80 | 373 | 252 | 68 | 139.6 | 91.2 | 65 | 141.0 | 117.6 | 83 | 101 |
| 5F | I 10-1(21) Ehrenberg-Phoenix | 515 | 337 | 65 | 211.2 | 200.0 | 95 | 78.7 | 79.1 | 101 | 37 |
| 6F | M 600-3-501 48th St-Hohokam Expressway | 489 | 429 | 88 | 143.8 | 107.1 | 75 | 80.6 | 65.4 | 81 | 56 |
| 7F | F 022-4-924 Globe-Safford | 424 | 270 | 64 | 116.6 | 65.0 | 56 | 173.2 | 124.7 | 72 | 149 |
| 8F | S 207-904 Bowie Jct-Safford | 846 | 406 | 48 | 175.0 | 145.4 | 83 | 119.2 | 66.5 | 56 | 68 |

TABLE 6

AGGREGATE TYPE

FOR TABLES 1, 2, 3

| LAB # | PIT # | AGGREGATE TYPE | BLEND # | AGGREGATE TYPE |
|---|---|---|---|---|
| 1 | 5781 | Basalt Quarry | 7470 Camp Verde | Quartzitic Sand & Gravel |
| 2 | Hospital Pit | Sand & Gravel | Wingfield Pit | Granitic Sand & Gravel |
| 3 | 8528 | Quartzite, Volcanics Sand & Gravel | NONE | NONE |
| 4 | 964 | Granitic Sand & Gravel | NONE | NONE |
| 5 | 5392 | Quartzitic Sand & Gravel | NONE | NONE |
| 6 | Old Cake | Crushed A.C. | Palace Yard Aggregate | Gravel |
| 7 | 5153 | Cinder Quarry | NONE | NONE |
| 8 | 2971 | Andesitic Sand & Gravel | NONE | NONE |
| 9 | 7007 | Schist, Granite, Basalt Sand & Gravel | NONE | NONE |
| 10 | 7214 | Basalt Sand & Gravel | NONE | NONE |
| 11 | 5781 | Basalt Quarry | NONE | NONE |
| 12 | 5781 | Baslat Quarry | NONE | NONE |
| 13 | 8538 | Basalt Quarry | 5390 | Basalt Sand & Gravel |
| 14 | 8076 | Basalt & Granite Sand & Gravel | 8034 | Gneiss & Granite Sand & Gravel |
| 15 | 7143 | Granitic Sand & Gravel | NONE | NONE |
| 16 | 8519 | Quartzite Quarry | 5907 | Granite & Quartzite Sand & Gravel |
| 17 | 8537 | Basalt Quarry | 6906 | Chert, Quartizite Sand & Gravel |

TABLE 6

AGGREGATE TYPE

FOR TABLES 1, 2, 3

| LAB # | PIT # | AGGREGATE TYPE | BLEND # | AGGREGATE TYPE |
|---|---|---|---|---|
| 18 | 8401 | Sandstone, Granite Quartzite Sand & Gravel | 8520 | Andesite & Sandstone Sand & Gravel |
| 19 | 5216 | Basalt Sand & Gravel | NONE | NONE |
| 20 | 7635 | Quartzitic Sand & Gravel | NONE | NONE |

Figure 11

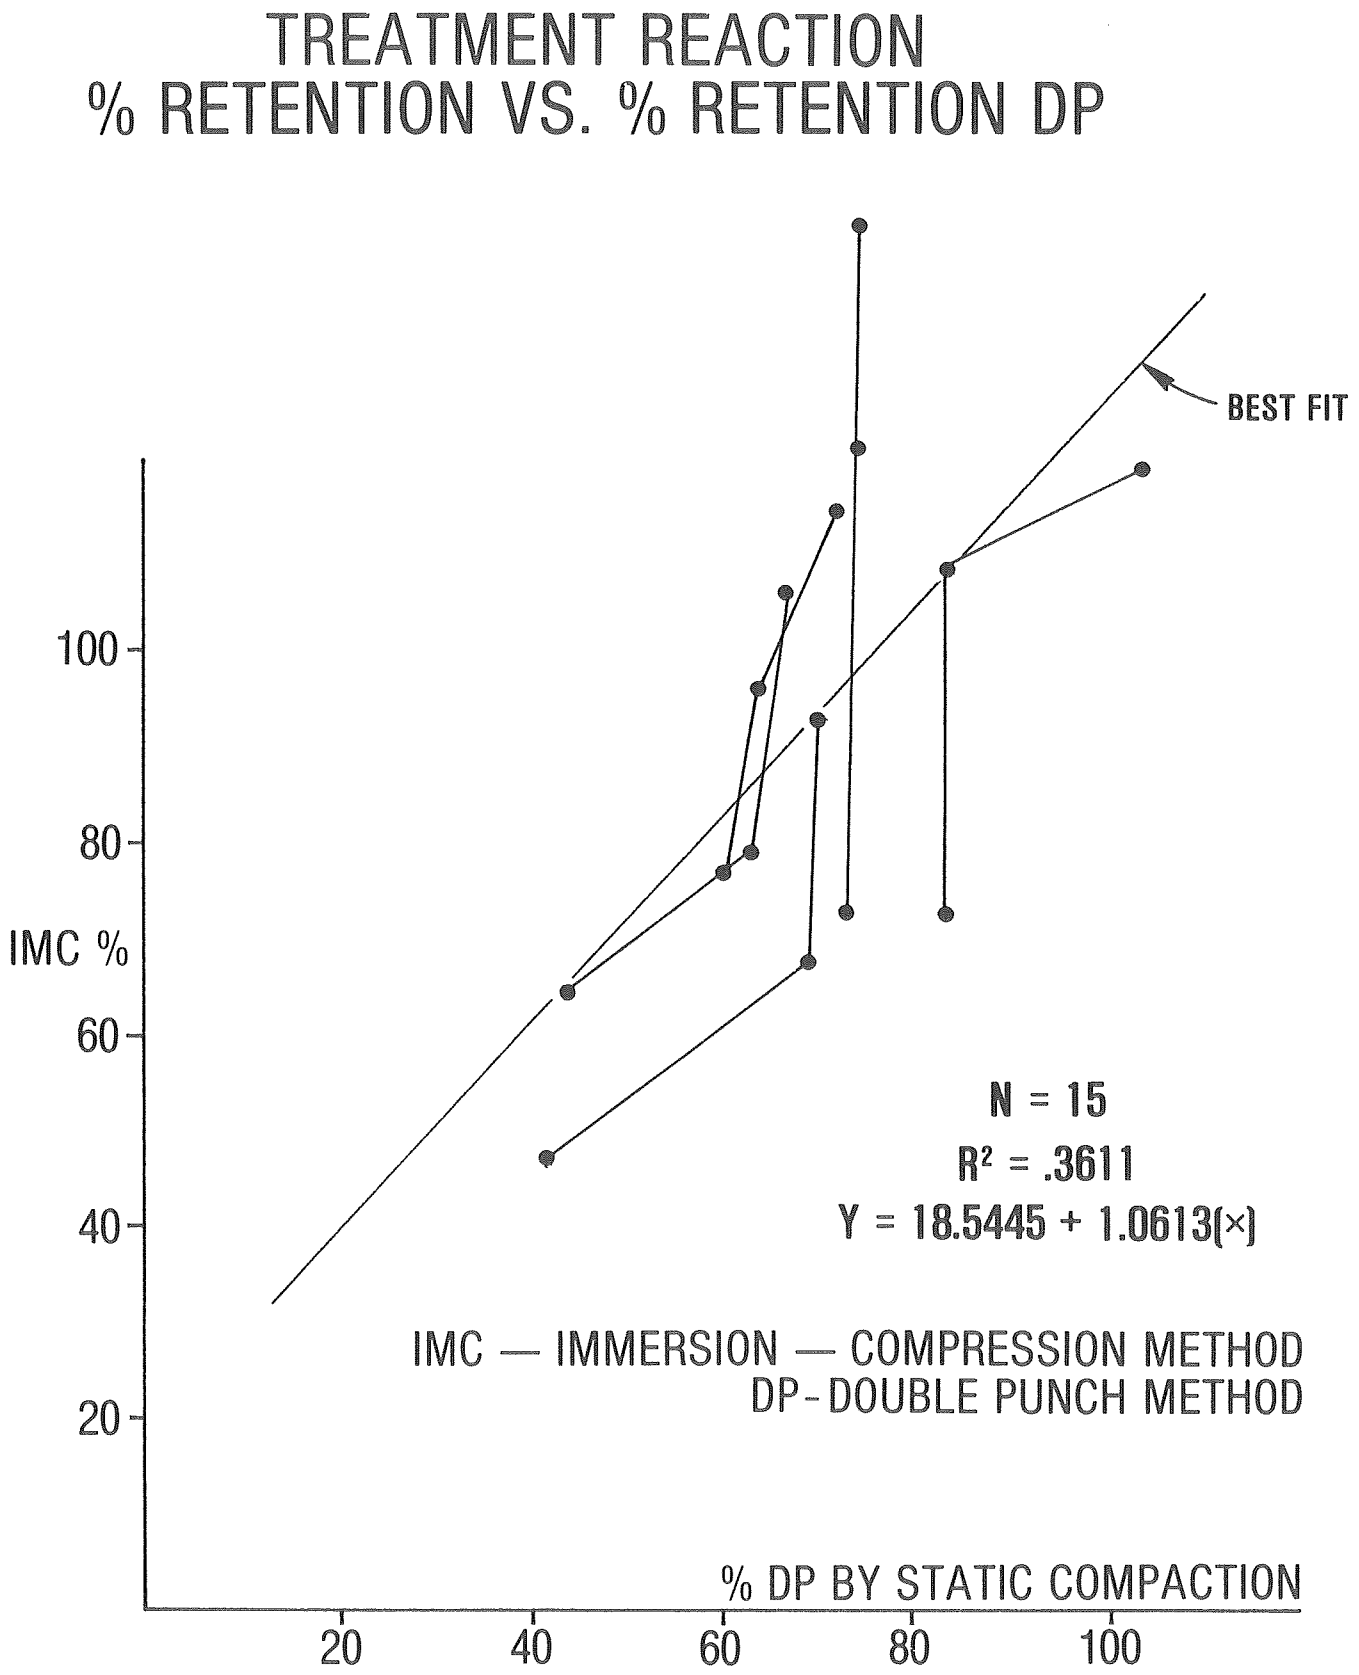
TREATMENT REACTION
% RETENTION VS. % RETENTION DP
BEST FIT
IMC %
100
80
60
40
20
N = 15
R² = .3611
Y = 18.5445 + 1.0613(x)
IMC — IMMERSION — COMPRESSION METHOD
DP-DOUBLE PUNCH METHOD
% DP BY STATIC COMPACTION
20
40
60
80
100

Figure 12

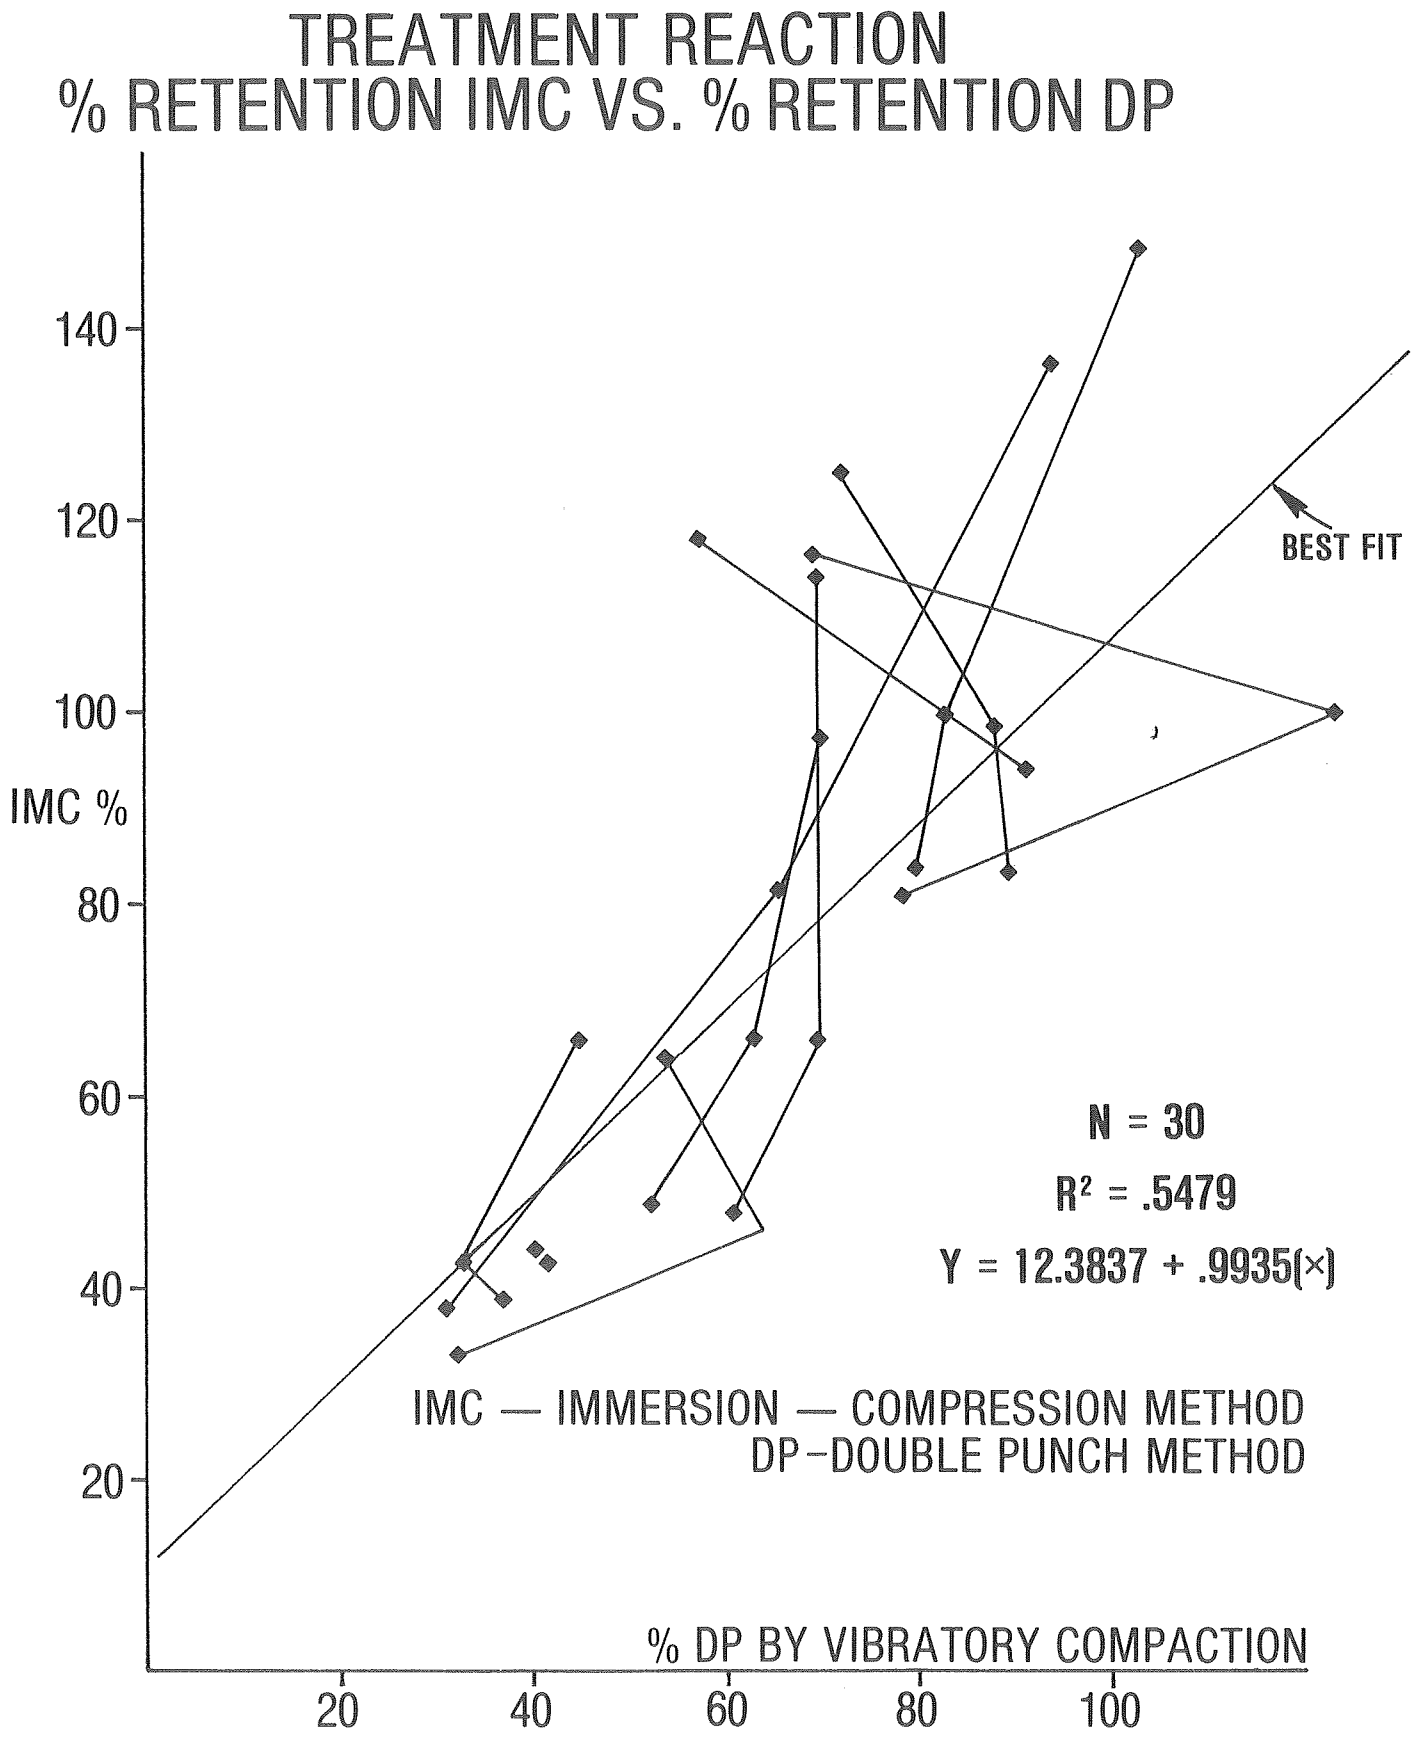
TREATMENT REACTION
% RETENTION IMC VS. % RETENTION DP
IMC %
140
120
100
80
60
40
20
BEST FIT
N = 30
R² = .5479
Y = 12.3837 + .9935(×)
IMC — IMMERSION — COMPRESSION METHOD
DP-DOUBLE PUNCH METHOD
% DP BY VIBRATORY COMPACTION
20
40
60
80
100

Figure 13

# TREATMENT REACTION
# % RETENTION IMC VS. % RETENTION DP

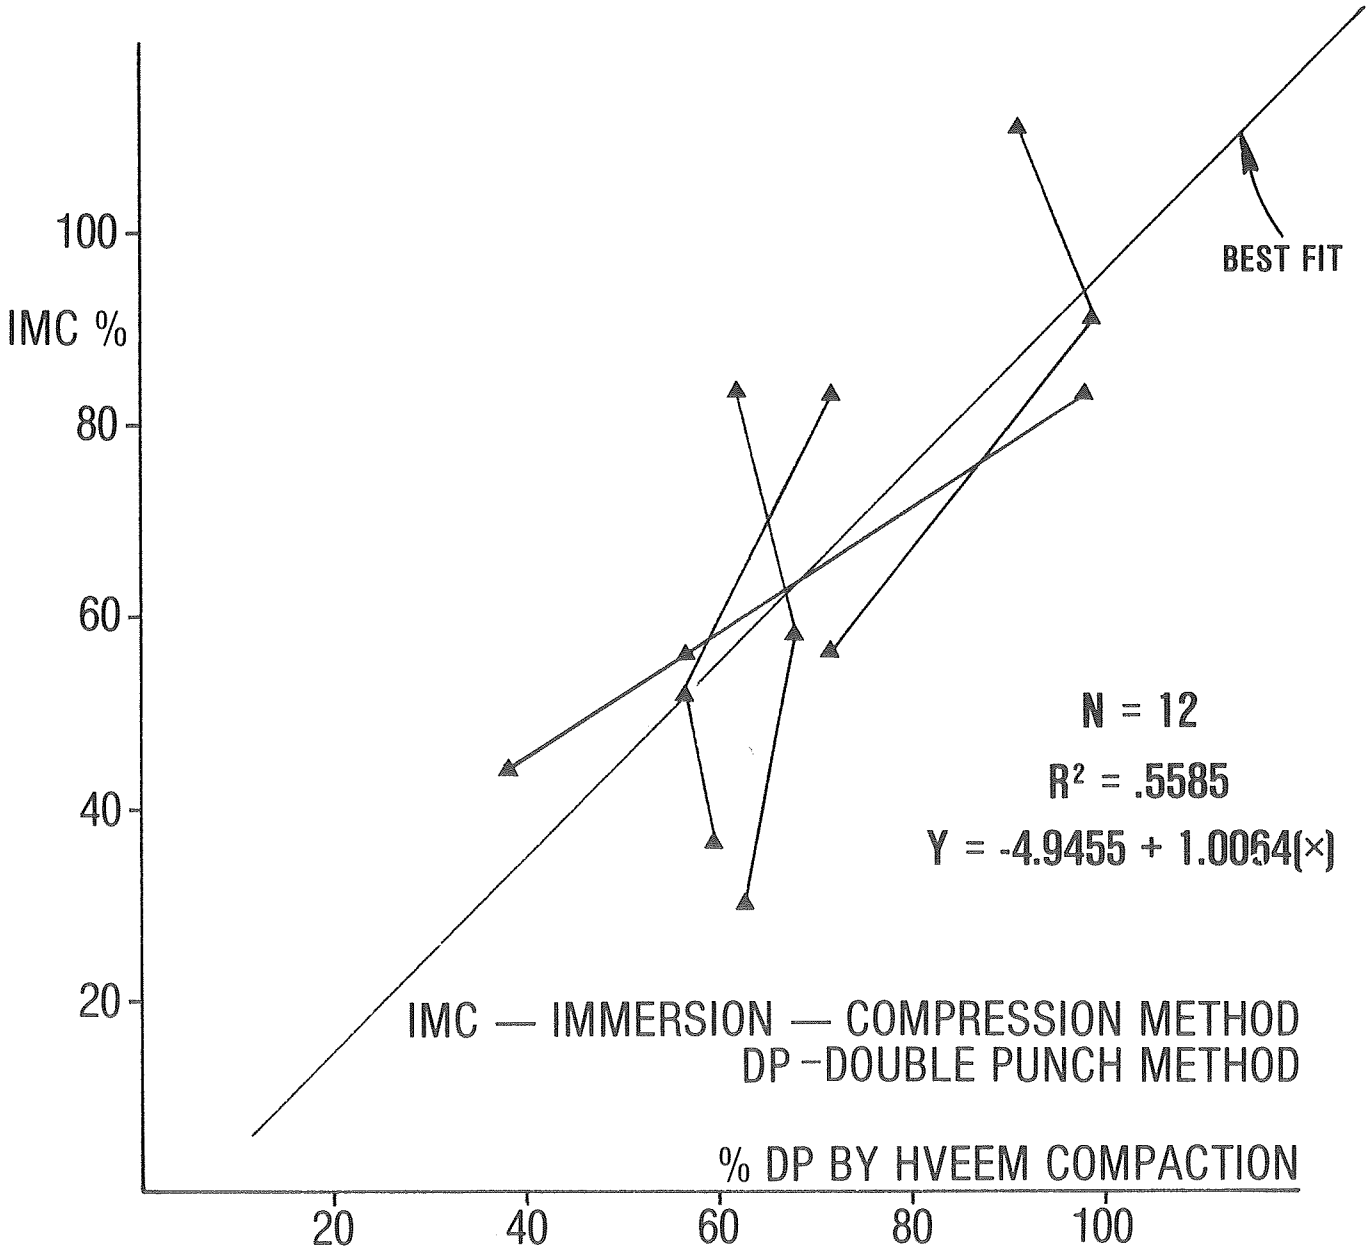

Figure 14

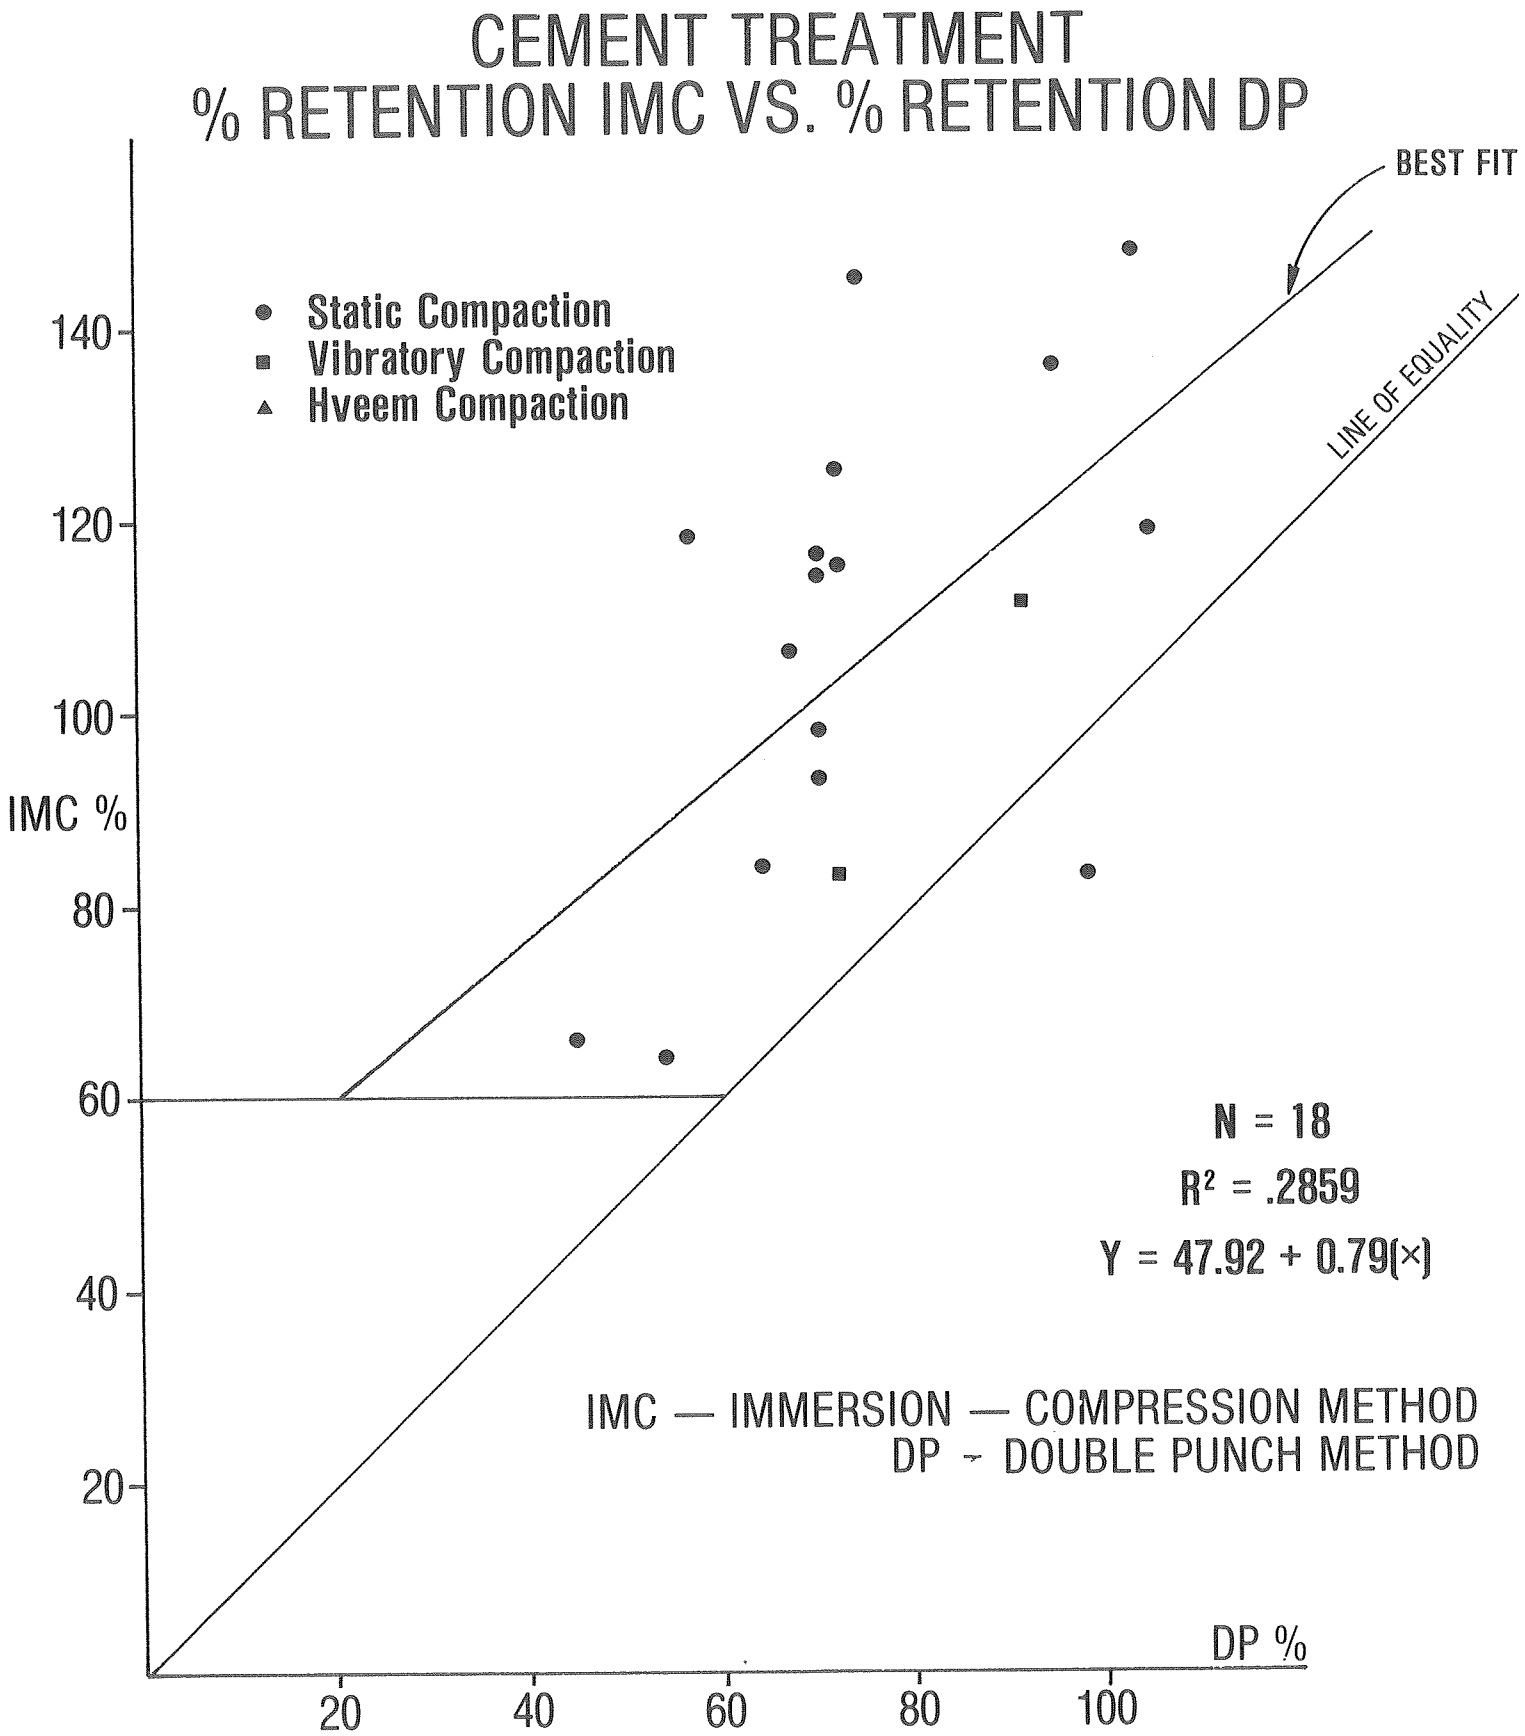
CEMENT TREATMENT
% RETENTION IMC VS. % RETENTION DP
BEST FIT
LINE OF EQUALITY
Static Compaction
Vibratory Compaction
Hveem Compaction
IMC %
140
120
100
80
60
40
20
N = 18
R² = .2859
Y = 47.92 + 0.79(x)
IMC — IMMERSION — COMPRESSION METHOD
DP - DOUBLE PUNCH METHOD
DP %
20
40
60
80
100

Figure 15

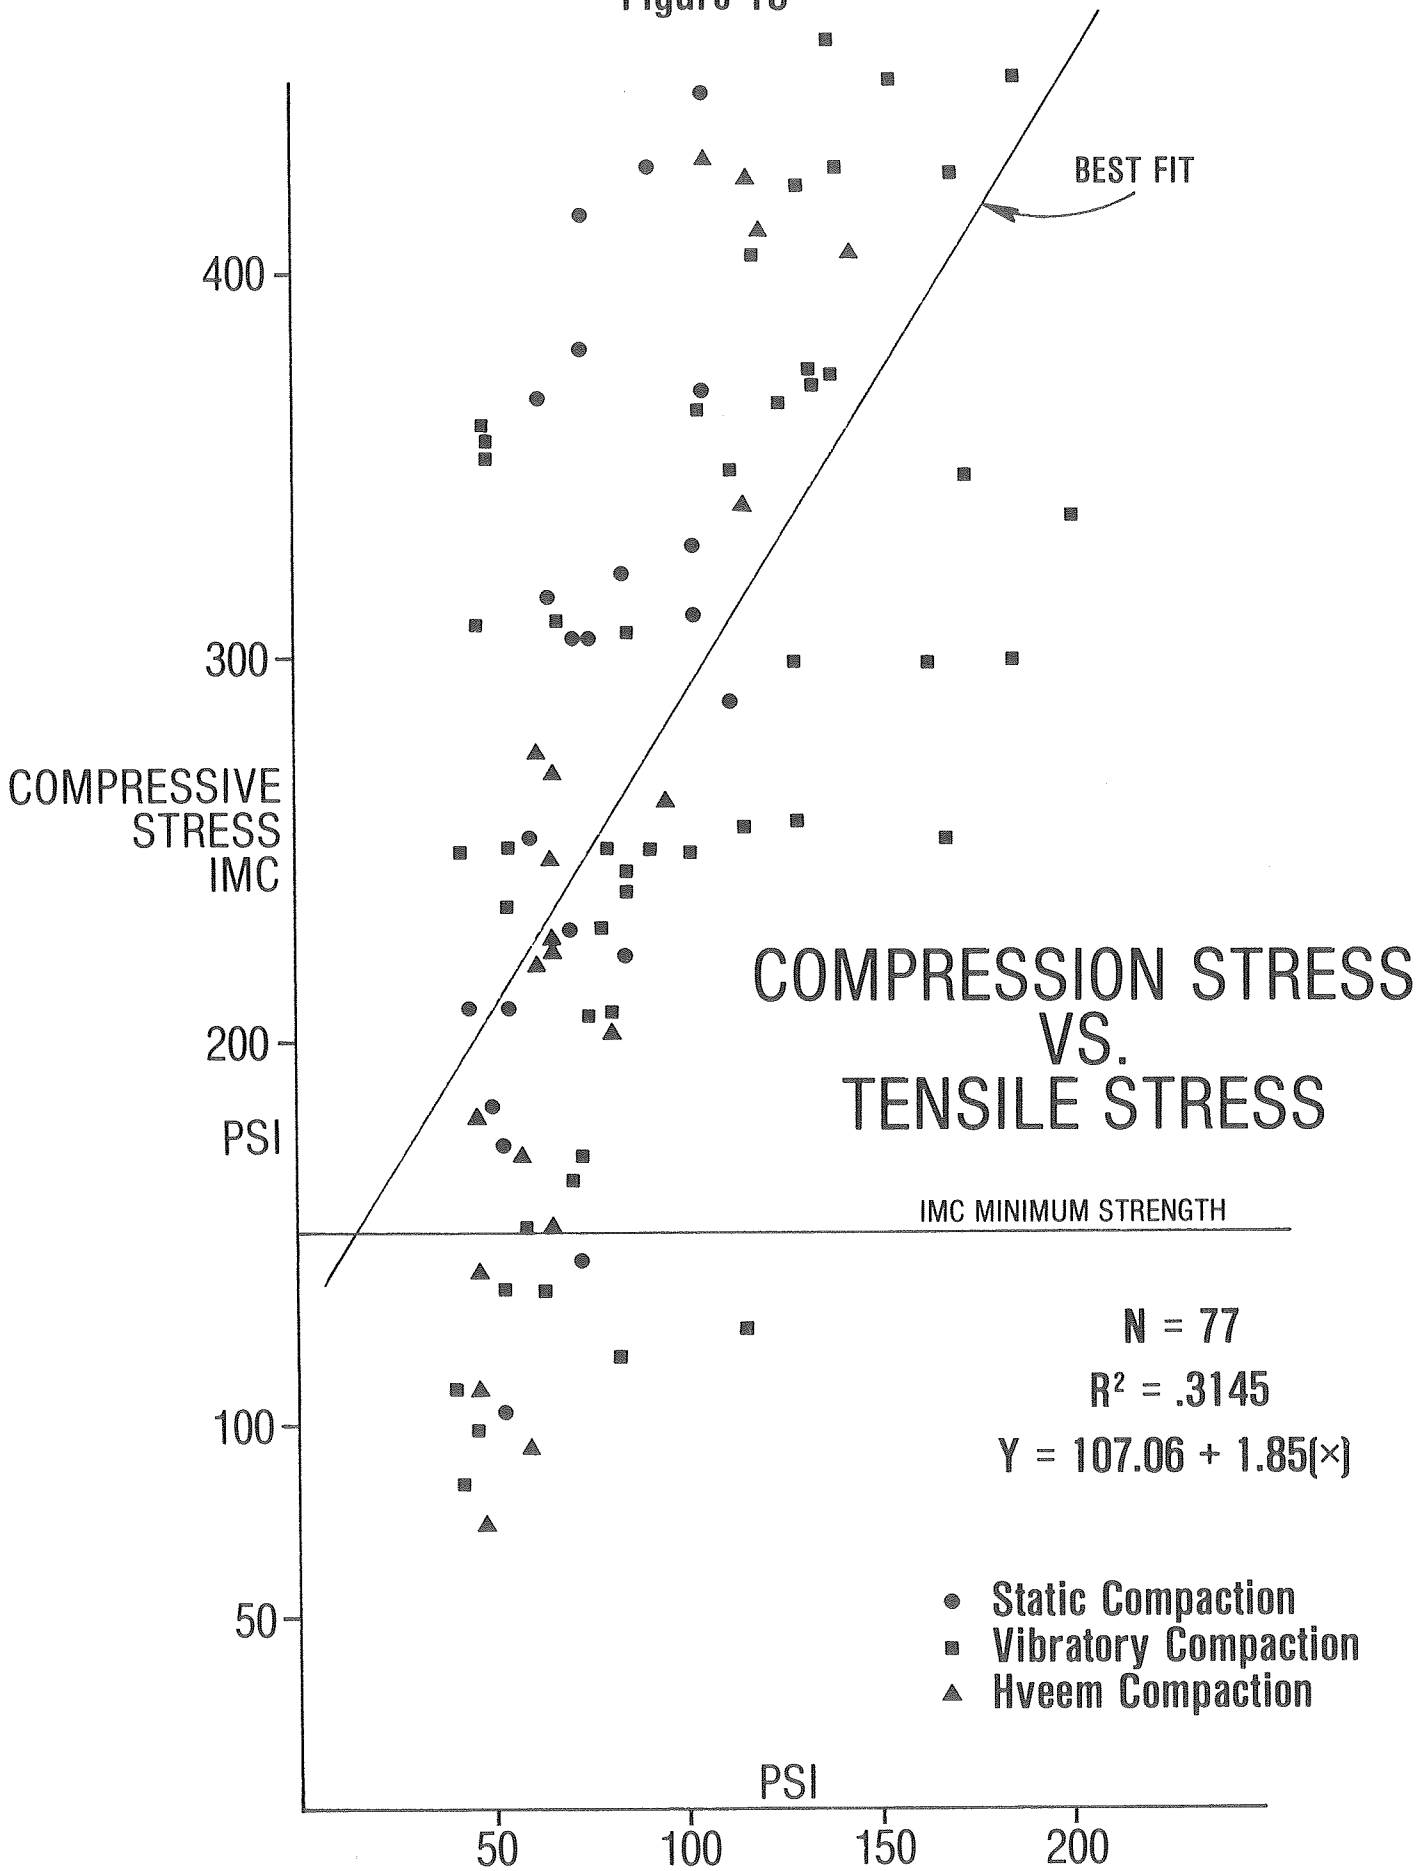
BEST FIT
400
300
COMPRESSIVE
STRESS
IMC
200
PSI
100
50
COMPRESSION STRESS
VS.
TENSILE STRESS
IMC MINIMUM STRENGTH
N = 77
R² = .3145
Y = 107.06 + 1.85(×)
Static Compaction
Vibratory Compaction
Hveem Compaction
PSI
50
100
150
200

Figure 16

# ANTISTRIP TREATMENT
# % RETENTION IMC VS. % RETENTION DP

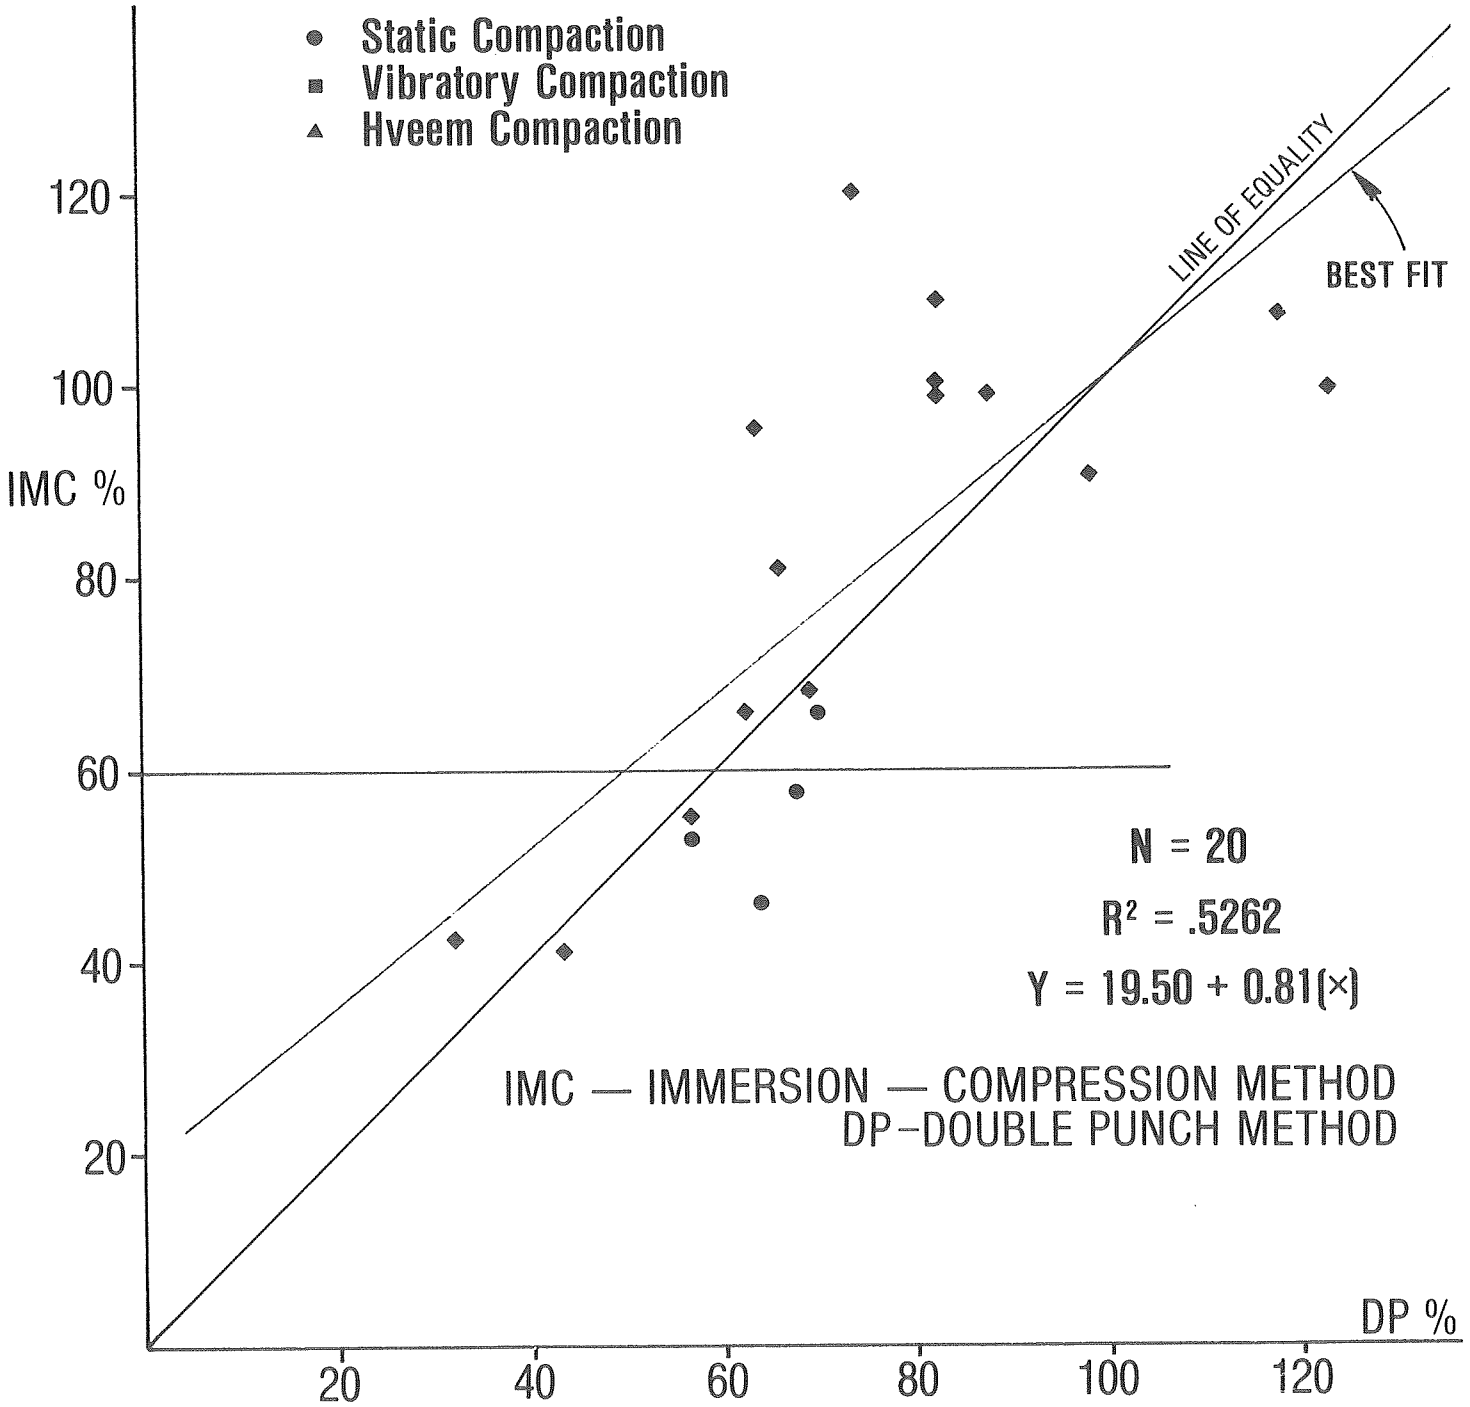

Figure 17

# WITHOUT TREATMENT
# % RETENTION IMC VS. % RETENTION DP

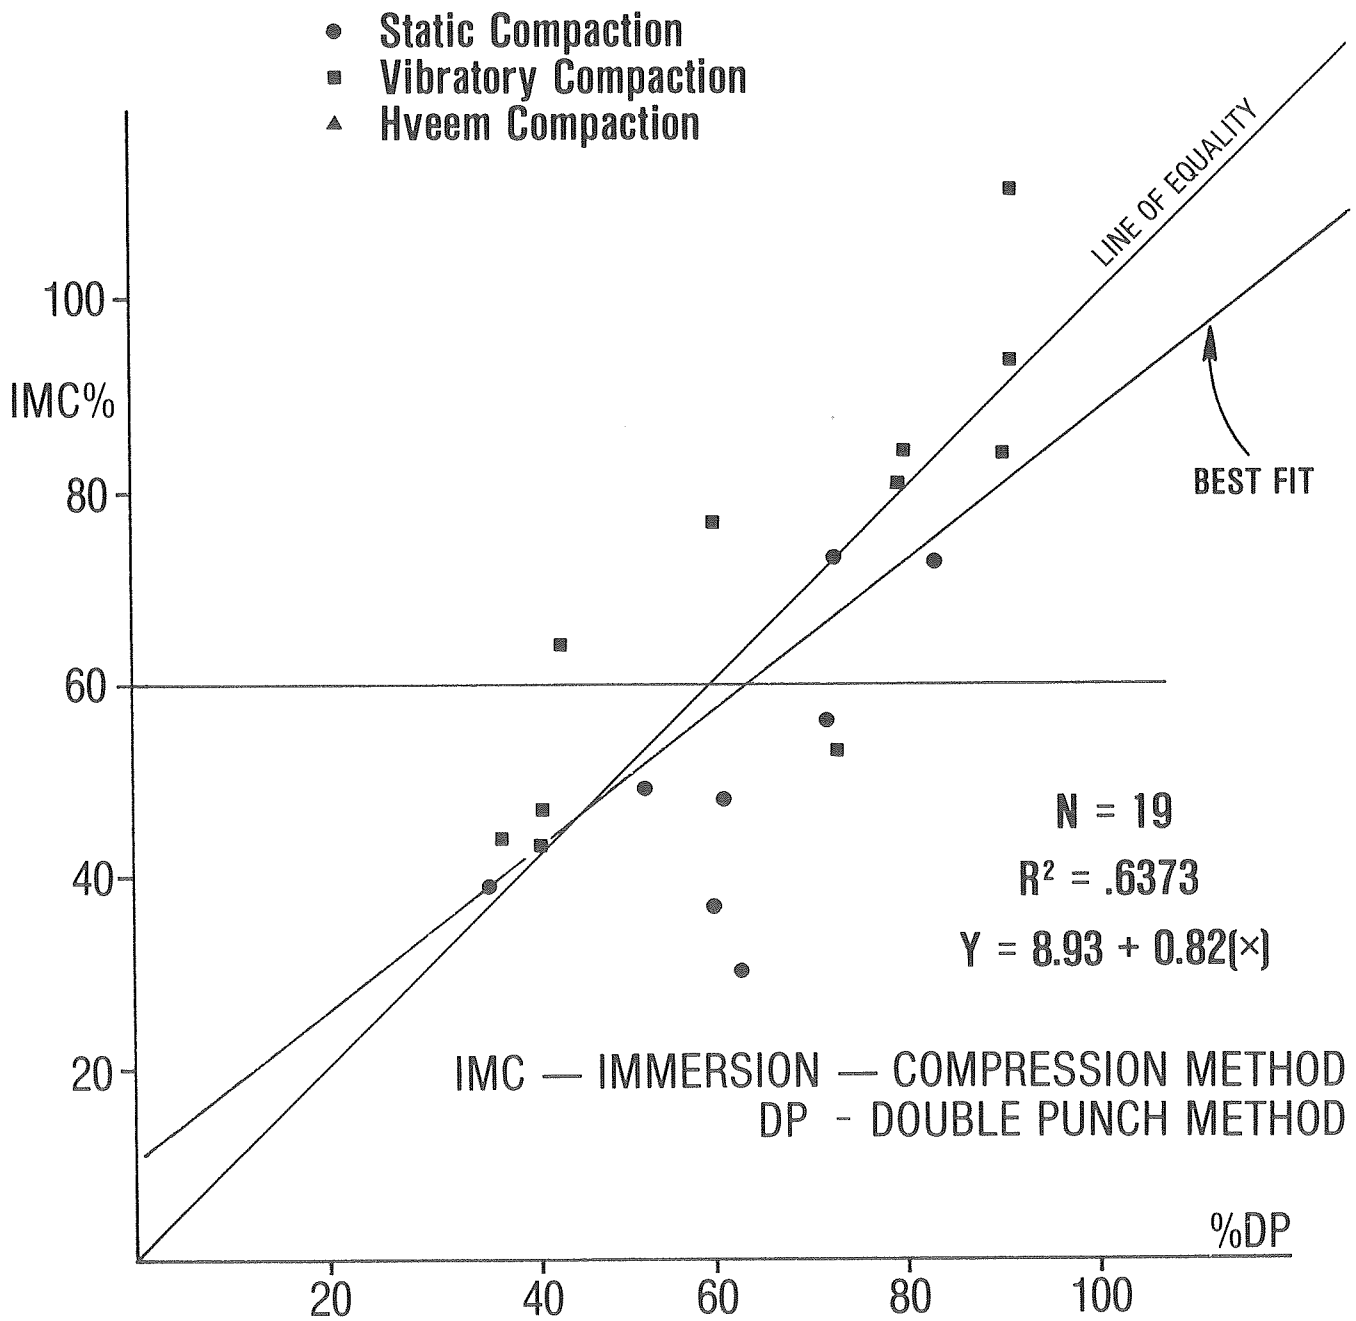

# APPENDIX B

ARIZ 802c
September 1971
(2 pages)

# EFFECT OF WATER ON COHESION OF COMPACTED, TREATED & UNTREATED BITUMINOUS MIXTURES

**(A Modification of AASHO T 165 & T 167)**

## Scope

1. This method of test is intended to measure the loss of cohesion resulting from the action of water on compacted bituminous mixtures containing penetration grade asphalt. The relation of cohesion reduction between untreated and specially treated specimens and the effect the additives have on specimens is observed.

## Apparatus

2. (a) Water bath. – The automatically controlled water bath shall be of sufficient size to permit total immersion of the test specimens. It shall permit accurate and uniform control of the immersion temperature within ±1.8° F (1° C). It shall be lined with a non-reactive material. The water used may be tap water, or any other potable water.

(b) A separate, manually or automatically controlled water bath for bringing immersed specimens to a temperature of 77° ±1.8° F (25° ±1.0° C) for the compression test. (Note 1.)

NOTE 1: *Any convenient pan or tank may be used, provided the specimens are totally immersed. The water bath in 2.(a) may be used, provided the warmer water is drained, and the heating controls can be adjusted to 77° ±1.8° F.*

(c) Molds. – Molding cylinders, and top and bottom molding plungers; the cylinders shall be 4.000 ±0.005 in. in inside diameter by 7 in. in height. The top and bottom plungers shall be 3.990 ±0.005 in. in diameter, shall have planed bearing surfaces, normal to their long axis.

(d) Testing Machine. – 50,000-pound capacity, minimum, and capable of a head speed of 0.2 in. per minute.

(e) Ovens. – One oven shall be capable of maintaining a temperature of 235° ±5° F, the other capable of 140° ± 5° F.

## Preparation of Sample

3. (a) The percentage and grade of asphalt as determined in design tests shall be used for all specimens prepared in this test.

(b) The weight of aggregate shall be 1700 ±2 g. The aggregate shall be proportioned in that grading determined by design.

(c) The required number of samples of aggregate shall be prepared. The project may require a study of effects of certain additives added in a percentage by weight of aggregates; generally the distribution of samples in Table I shall be used unless otherwise specified:

**TABLE I**

| No. of Samples | Type Additive | % by Wt. | Wt. | Total Wt. |
|---|---|---|---|---|
| 4 | none | — | — | 1700 g. |
| 2 | Anti-stripping | See Note 3 | | — g. |
| 2 | Dry Lime | 2% | 34 g. | 1734 g. |
| 2 | Wet Lime (Note 2) | 2% Lime & 3% Water | 34 g. 51 g. | 1734 g. |

**TABLE II**

**WEIGHT OF ASPHALT NEEDED FOR PERCENTAGE REQUIREMENTS, BASED ON 1734 G OF AGGREGATE**

| Percentage Required | 3.0 | 3.5 | 4.0 | 4.5 | 5.0 | 5.5 | 6.0 | 6.5 |
|---|---|---|---|---|---|---|---|---|
| Amount Asphalt, g. | 54 | 63 | 72 | 82 | 91 | 101 | 111 | 121 |
| Total Wt. of Mix, g | 1788 | 1797 | 1806 | 1816 | 1825 | 1835 | 1845 | 1855 |

*NOTE 2: The "Wet Lime" Treatment shall be thoroughly mixed with the aggregate and allowed to cure at room temperature for 48 hours to 7 days. Then it shall be dried to constant weight at 235° ± 5° F. This curing shall be done in advance of the preparation of the other specimens in order to allow immersion of all specimens at the same time.*

*NOTE 3: The anti-stripping agent is added to the asphalt in a proportion of 1.0% by weight of asphalt required for a 1700 g. aggregate sample.*

(d) The weight of asphalt to be added to the aggregate shall be determined on the basis of total weight of mix using Table II.

*NOTE 4: For the blank specimens, use Table I in ARIZ 800, based on 1700 g. of aggregate.*

(e) Mix the asphalt with the aggregate as specified in section 5 of ARIZ 800.

## Compaction of Specimens

4. (a) Place the mixtures in an oven maintained at 235° ± 5° F for 2 hours or until they attain a constant temperature.

(b) Remove one heated sample from the oven and immediately place about half of it into the molding cylinder which, together with the top and bottom plunger, shall have been preheated. Paraffin-coated cardboard discs shall be used to prevent material adhering to the plungers. With the bottom plunger in place, spade the mixture vigorously with a heated spatula or a similar flat object, 15 times around the edges of the mold and 10 times at random over the mixture. Place the remaining half of the mixture into the mold and repeat the process. The spatula should penetrate the mixture as deeply as possible. The top of the mixture should be slightly rounded to aid in firm seating of the upper plunger.

(c) Place the upper plunger on the sample and compress the mixture under an initial load of 150 psi, to set it against the sides of the mold. Remove the support bars and permit full double-plunger action. Apply the load to the mixture at a rate of 0.2 inch per minute until a load of 3000 psi is reached. Hold the load at 3000 psi for 2 minutes. Remove the specimen from the mold with an ejection device that provides a smooth, uniform rate of travel for the ejection head. The specimens shall be placed in a forced draft air bath for approximately 2 hours at 77° ± 1.8° F.

(d) Place the specimen in an oven maintained at 140° ± 5° F, and cure for 16 to 20 hours.

(e) Repeat steps 4. (b) through 4. (d) for the other mixtures.

## Immersion Procedure

5. (a) Remove 2 blank specimens from the 140° F oven and allow to cool in a forced draft air bath at 77° ± 1.8° F for 4 hours before breaking. Break in the testing machine as in section 6.

(b) Immediately place all other specimens into the water bath maintained at 140° ± 1.8° F for 18 to 24 hours. Make sure all specimens are completely immersed.

(c) At the end of the immersion period, transfer the specimen to a water bath maintained at 77° ± 1.8° F for 2 hours.

## Compression

6. (a) Place each specimen between the bearing plates of the testing machine, and apply axial compression at a uniform rate of vertical deformation of 0.20 inch per minute. Record the pound load at which the specimen fails.

## Calculation

7. (a) Record the average failure point for each pair of identically treated specimens.

(b) Record the average failure point for the two blank specimens that were not subjected to immersion.

(c) The numerical index of resistance of treated mixtures to the detrimental effect of water shall be expressed as the percentage of the original strength of the blank specimens in 7.(b). It shall be calculated as follows:

$$\text{Index of retained strength} = \frac{S_2}{S_1} \times 100$$

Where:

$S_1$ = Compressive strength of dry blanks, 7. (b).

$S_2$ = Compressive strength of immersed specimens 7. (a).

(d) The index shall be recorded to the nearest 1 percent.