NO	DESCRIPTION OF REVISIONS	MADE BY	DATE
1	NEW ISSUE	L. LOPEZ	4/07
2			
3			
4			



ONE LINE HORIZONTAL, DIAGONAL OR VERTICAL ARROW



TWO LINE VERTICAL OR DIAGONAL ARROW



TWO LINE HORIZONTAL ARROW

ARROWHEAD IS WIDENED 130% IN VERTICAL DIRECTION ONLY

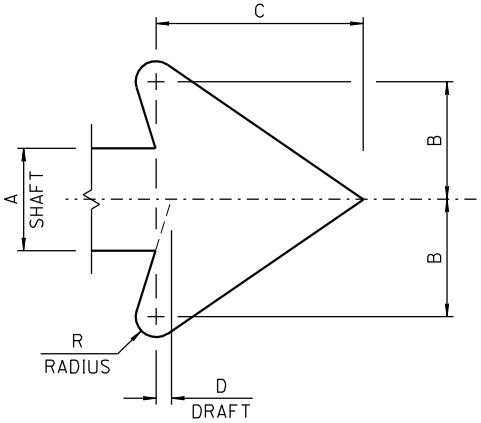

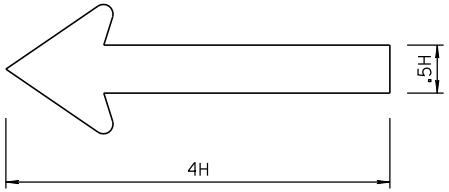

HORIZONTAL ARROW FOR PLACEMENT AT BOTTOM OF SIGN

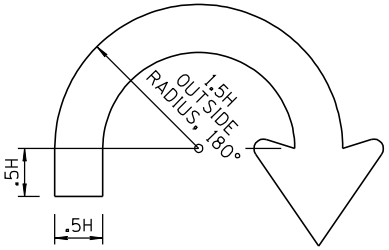

LOOP ARROW

H	A	B	C	D	R
4	2	2 5/16	4 1/16	5/16	3/8
5	2 1/2	2 7/8	5 1/16	3/8	1/2
6	3	3 1/2	6 1/8	7/16	9/16
7	3 1/2	4	7 1/8	9/16	11/16
8	4	4 5/8	8 1/8	5/8	13/16
9	4 1/2	5 3/16	9 1/8	11/16	7/8
10	5	5 3/4	10 1/8	3/4	1
11	5 1/2	6 3/8	11 1/8	7/8	1 1/8
12	6	6 7/8	12 3/16	15/16	1 3/16
13	6 1/2	7 1/2	13 3/16	1	1 5/8
14	7	8	14 3/16	1 1/16	1 3/8
15	7 1/2	8 5/8	15 3/16	1 1/8	1 1/2
16	8	9 3/16	16 1/4	1 1/4	1 5/8

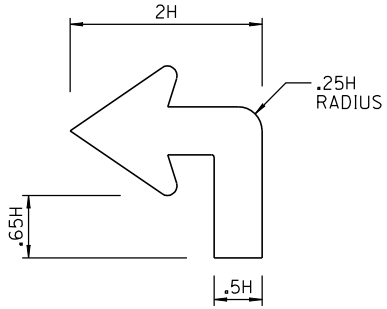

ADVANCE ARROW

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. ALL ARROWHEADS ARE STANDARD FEDERAL ARROWHEADS EXCEPT AS NOTED.
3. H = UPPER CASE LETTER HEIGHT ON SIGN LEGEND.

SHEET 2 OF 2
NOT TO SCALE

DESIGN APPROVED SIGNATURE ON FILE	ARIZONA DEPARTMENT OF TRANSPORTATION INTERMODAL TRANSPORTATION DIVISION STANDARD DRAWINGS	REV. 4/07
APPROVED FOR DISTRIBUTION	ARROWS FOR USE ON GROUND MOUNT GUIDE SIGNS ON CONVENTIONAL ROADWAYS, RAMPS, AND CROSSROADS	DRAWING NO. S-12